
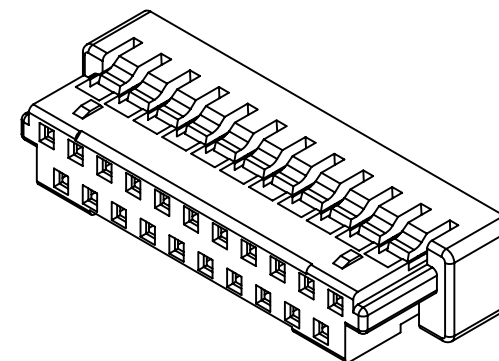
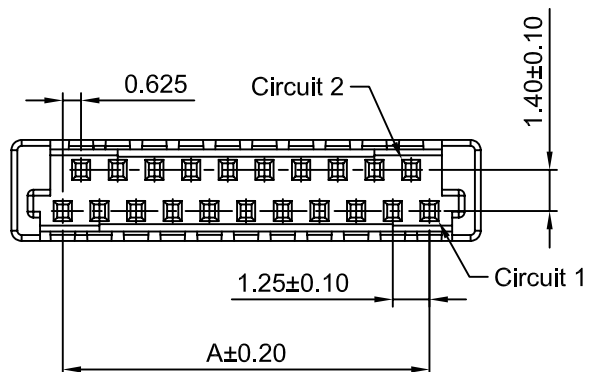


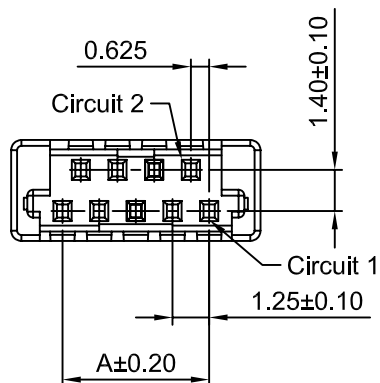


#### SPECIFICATIONS:


Current Rating: 1A AC,DC  
Voltage Rating: 200V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 40mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Material: Nylon 66,UL94V-0(Black)

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 5P       | 2.50           | 4.90  | 6.00  | 17P      | 10.00          | 12.40 | 13.50 |
| 7P       | 3.75           | 6.15  | 7.25  | 19P      | 11.25          | 13.65 | 14.75 |
| 9P       | 5.00           | 7.40  | 8.50  | 21P      | 12.50          | 14.90 | 16.00 |
| 11P      | 6.25           | 8.65  | 9.75  | 31P      | 18.75          | 21.15 | 22.25 |
| 13P      | 7.50           | 9.90  | 11.00 | 41P      | 25.00          | 27.40 | 28.50 |
| 15P      | 8.75           | 11.15 | 12.25 |          |                |       |       |

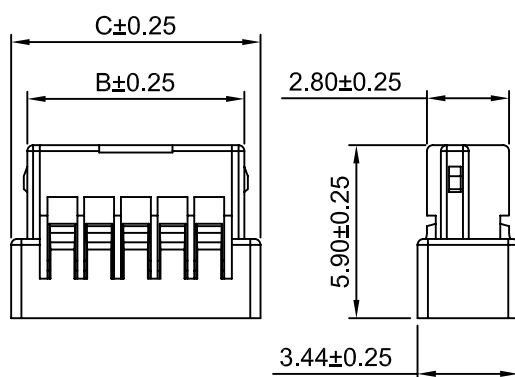

5,7,9,11P

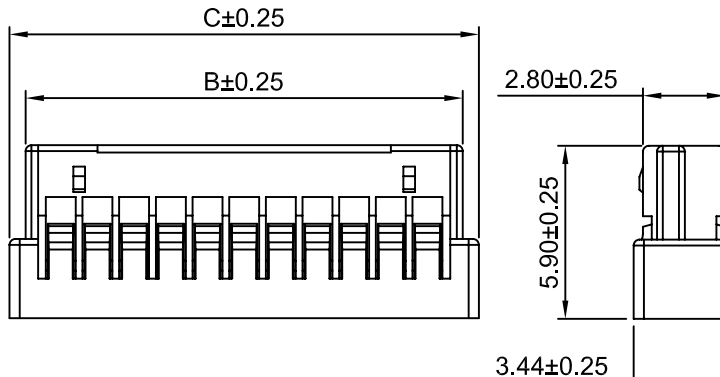

13,15,17,19,21,31,41P

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm  
Scale: 4:1  
Sheet: 1 of 1

Draw BY: LIZQ  
Approved: GONGYB

General Tolerance

x.xx±0.25  
x.xx±0.20  
x.xxx±0.15



Title : 1.25mm PITCH  
DUAL ROW HOUSING

DRAW NO : A1256HD-XP  
REV A0

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2005.05.10 |