

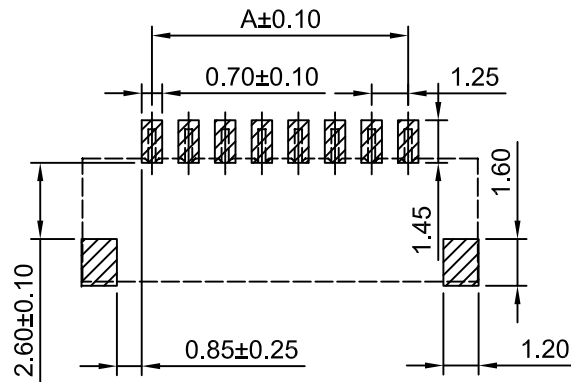

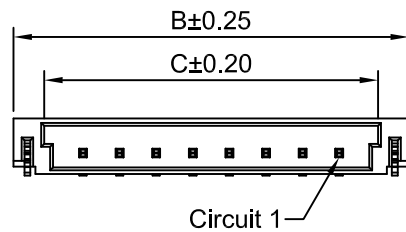

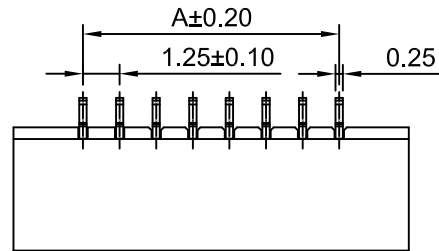




P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:
A1256WRB-S-XP - ** - ***
1 2 3

- 1.Part NO.
- 2.Style:
(Blank): Type 1
2: Type 2
- 3.Finish:
(Blank): Tin over Nickel
G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Gold over Nickel
Material: LCP,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	6.00	3.90	5P	5.00	9.75	7.65
3P	2.50	7.25	5.15	6P	6.25	11.00	8.90
4P	3.75	8.50	6.40	8P	8.75	13.50	11.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1	1.25mm PITCH 90° DUAL ROW WAFER -SMD TYPE		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			A1256WRB-S-XP-LCP		A0

A0	NEW RELEASE	2020.12.30
REV	DESCRIPTION	DATE