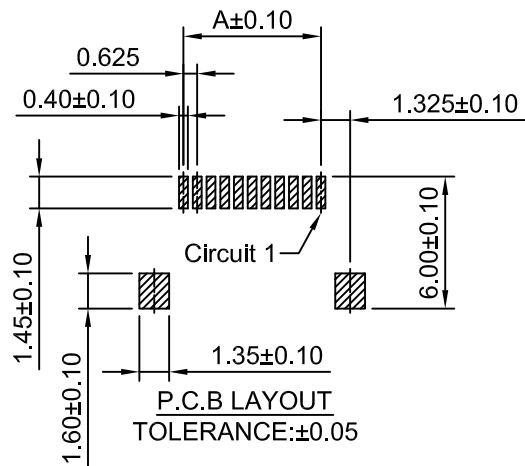


Ordering Information:

A1256WRA-S-XP - **
1 2

1.Part NO.

2.Finish:

(blank): Nylon 6T,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 40mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute





Pin Material: Phosphor Bronze/Gold over Nickel

Solder Tabs: Brass/Gold over Nickel

Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1256WRDA-S-5P	2.50	6.10
A1256WRDA-S-7P	3.75	7.35
A1256WRDA-S-9P	5.00	8.60
A1256WRDA-S-11P	6.25	9.85
A1256WRDA-S-13P	7.50	11.10
A1256WRDA-S-15P	8.75	12.35
A1256WRDA-S-17P	10.00	13.60
A1256WRDA-S-19P	11.25	14.85
A1256WRDA-S-21P	12.50	16.10
A1256WRDA-S-31P	18.75	22.35
A1256WRDA-S-41P	25.00	28.60

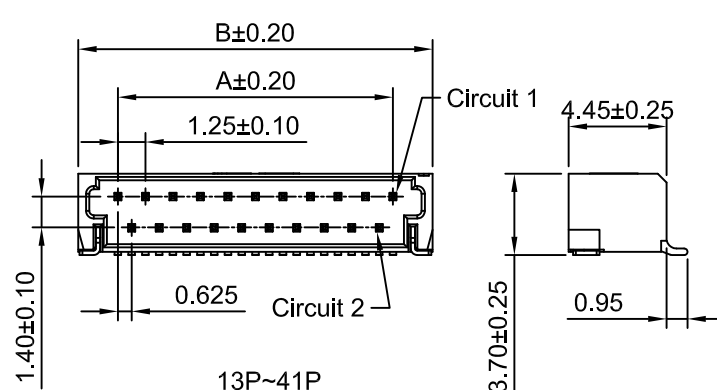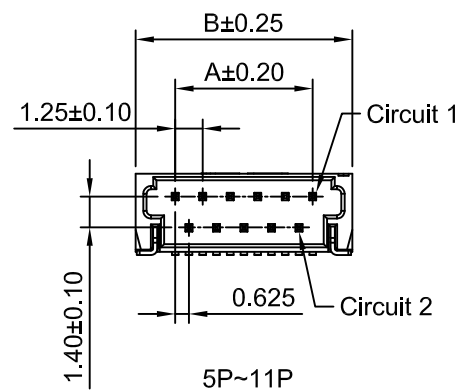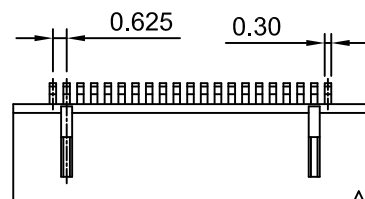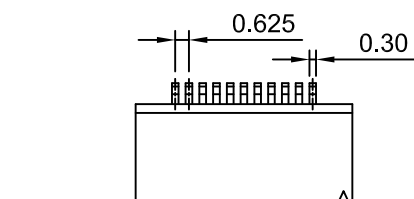

A2	CHANGE THE DRAWING	2020.11.11
A1	CHANGE THE DRAWING	2020.05.07
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit	Scale	Sheet	1.25mm PITCH 90° DUAL ROW WAFER -SMD TYPE	
mm	3:1	1 of 1		
DRWN	CHKD	APPR		
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.	
			A1256WRDA-S-XP	
			REV A2	