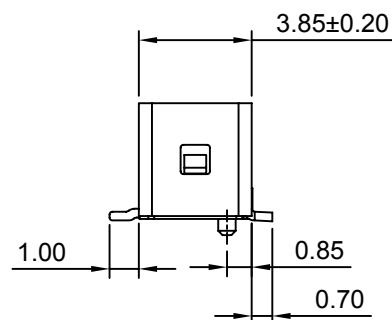
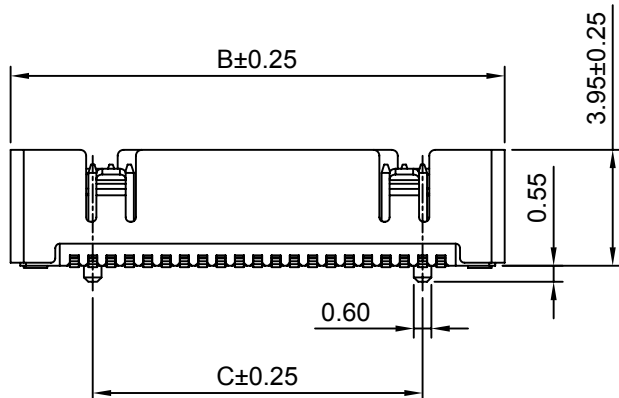
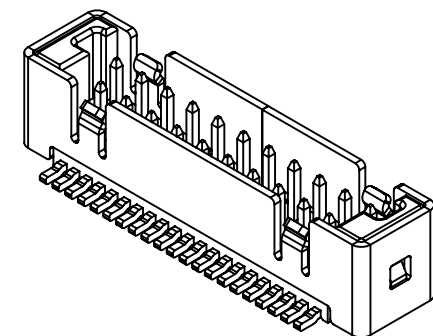
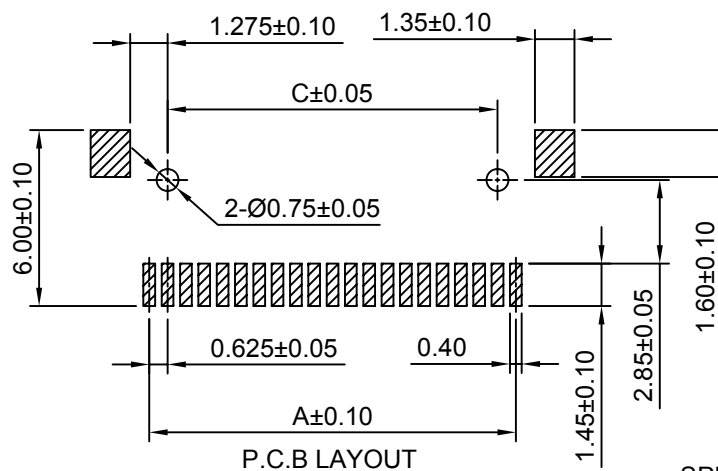
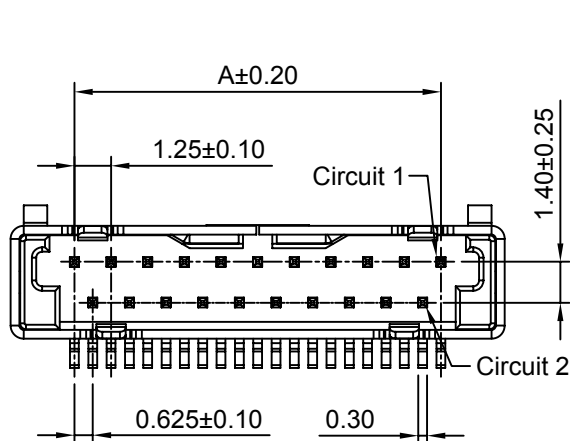


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Shell: Phosphor Bronze/Tin over Nickel
Cap: Nylon 6T,UL94V-0(Black)
Material: Nylon 6T,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
21P	12.50	16.85	11.25
31P	18.75	23.10	17.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
LIZQ	GONGYB

General Tolerance

x.xs0.25	ANGLE±
x.xx0.20	
x.xxx0.15	

Title :

1.25mm PITCH
180° DUAL ROW
WAFER-SMT TYPE

DRAW NO : A1256WVD-S-F-XP

REV
A0

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE