

Ordering Information:

A1257H-2xXP - ***

1 2

1.Part NO.

2.Color:

(Blank): White

BK: Black

BL: Blue

OR: Orange

LY: Lemon yellow

LE: Light blue

TR: Tomato red

MG: Moss green

DPK: Dark pink

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.






Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute


Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1257H-2x5P	5.00	9.50
A1257H-2x6P	6.25	10.75
A1257H-2x7P	7.50	12.00
A1257H-2x8P	8.75	13.25
A1257H-2x9P	10.00	14.50
A1257H-2x10P	11.25	15.75
A1257H-2x11P	12.50	17.00
A1257H-2x12P	13.75	18.25
A1257H-2x13P	15.00	19.50
A1257H-2x14P	16.25	20.75
A1257H-2x15P	17.50	22.00
A1257H-2x16P	18.75	23.25
A1257H-2x18P	21.25	25.75
A1257H-2x19P	22.50	27.00
A1257H-2x20P	23.75	28.25

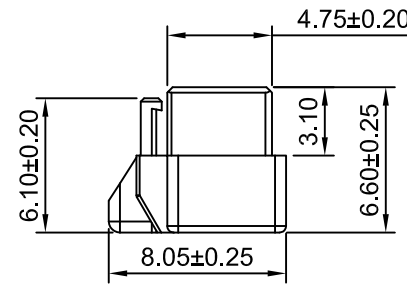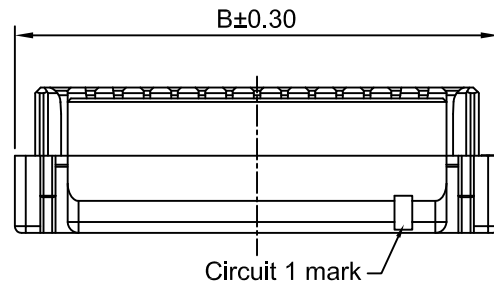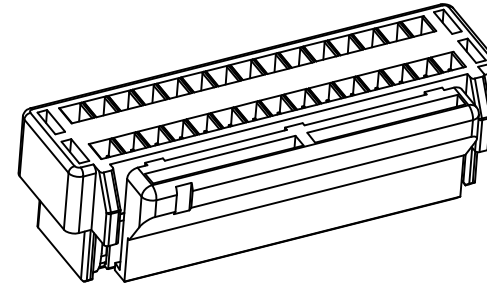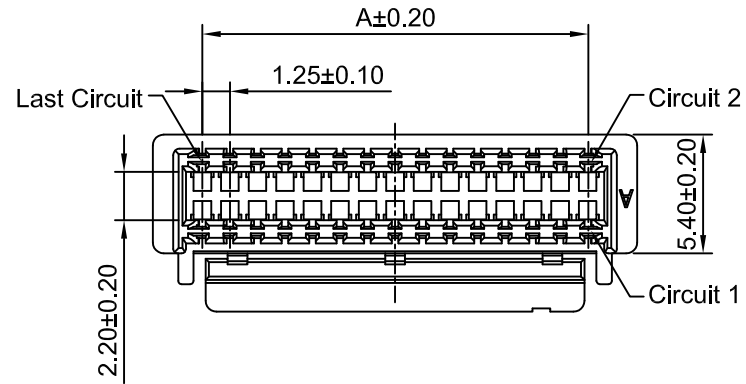

2x5P~2x7P

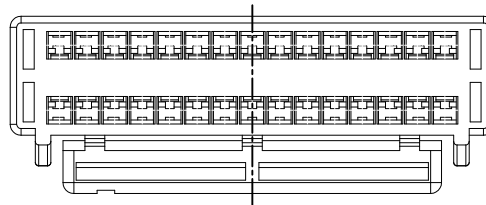

2x8P~2x20P

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	1.25mm PITCH HOUSING		
DRAWN	CHK'D	APPR			
Haisen Li	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. A1257H-2xXP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
			REV A0		