
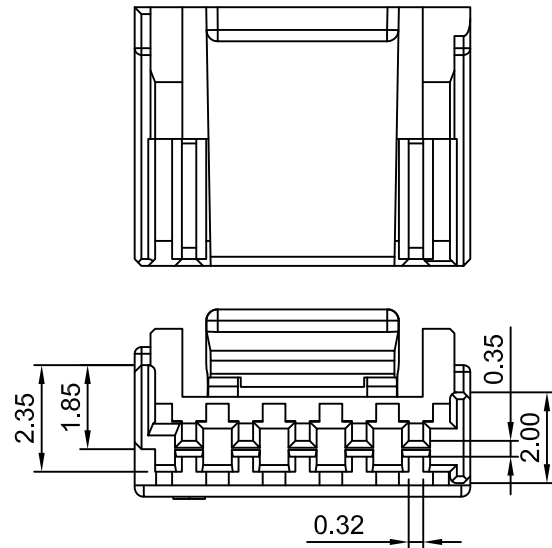
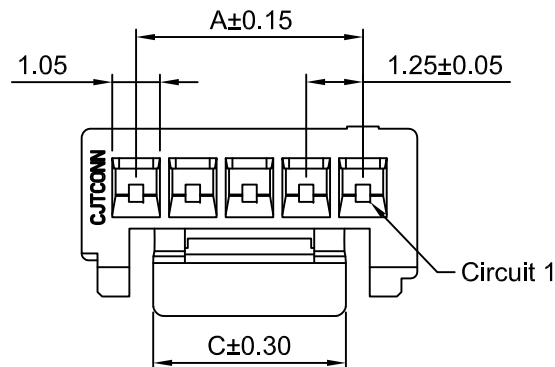



2P~4P

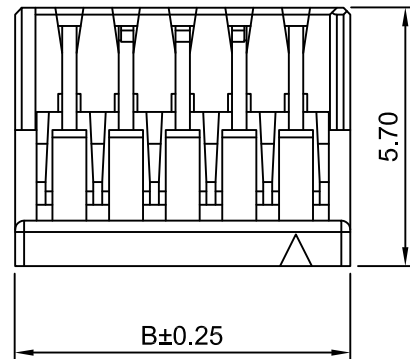

### SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(Gray)

### Ordering Information & Dimensions

| Part No.        | Dimensions(mm) |       |      |
|-----------------|----------------|-------|------|
|                 | A              | B     | C    |
| A1257HD-2P-PBT  | 1.25           | 3.65  | 2.10 |
| A1257HD-3P-PBT  | 2.50           | 4.90  | 3.00 |
| A1257HD-4P-PBT  | 3.75           | 6.15  | 4.05 |
| A1257HD-5P-PBT  | 5.00           | 7.40  | 4.25 |
| A1257HD-6P-PBT  | 6.25           | 8.65  | 6.25 |
| A1257HD-7P-PBT  | 7.50           | 9.90  | 6.25 |
| A1257HD-8P-PBT  | 8.75           | 11.15 | 6.25 |
| A1257HD-9P-PBT  | 10.00          | 12.40 | 6.25 |
| A1257HD-10P-PBT | 11.25          | 13.65 | 8.20 |
| A1257HD-11P-PBT | 12.50          | 14.90 | 8.20 |
| A1257HD-12P-PBT | 13.75          | 16.15 | 8.20 |
| A1257HD-13P-PBT | 15.00          | 17.40 | 8.20 |
| A1257HD-14P-PBT | 16.25          | 18.65 | 8.20 |
| A1257HD-15P-PBT | 17.50          | 19.90 | 8.20 |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

|           |             |          |
|-----------|-------------|----------|
| Unit      | Scale       | Sheet    |
| mm        | 6:1         | 1 of 1   |
| DRAWN     | CHK         | APVD     |
| Haisen Li | DianKui Wan | Jack Yin |

|                         |  |                |     |
|-------------------------|--|----------------|-----|
| TITLE                   |  | DRAWING NO     | REV |
| 1.25mm PITCH<br>HOUSING |  |                |     |
| THIRD ANGLE PROJECTION  |  | A1257HD-XP-PBT | A2  |

|     |                     |            |
|-----|---------------------|------------|
| A2  | CHANGE THE DRAWING  | 2022.09.23 |
| A1  | ADD THE INFORMATION | 2020.09.08 |
| A0  | NEW RELEASE         | 2016.09.08 |
| REV | DESCRIPTION         | DATE       |

|                   |
|-------------------|
| General Tolerance |
| x.xx±0.25         |
| x.xxx±0.20        |
| x.xxxx±0.15       |
| ANGLES ±1°        |

