
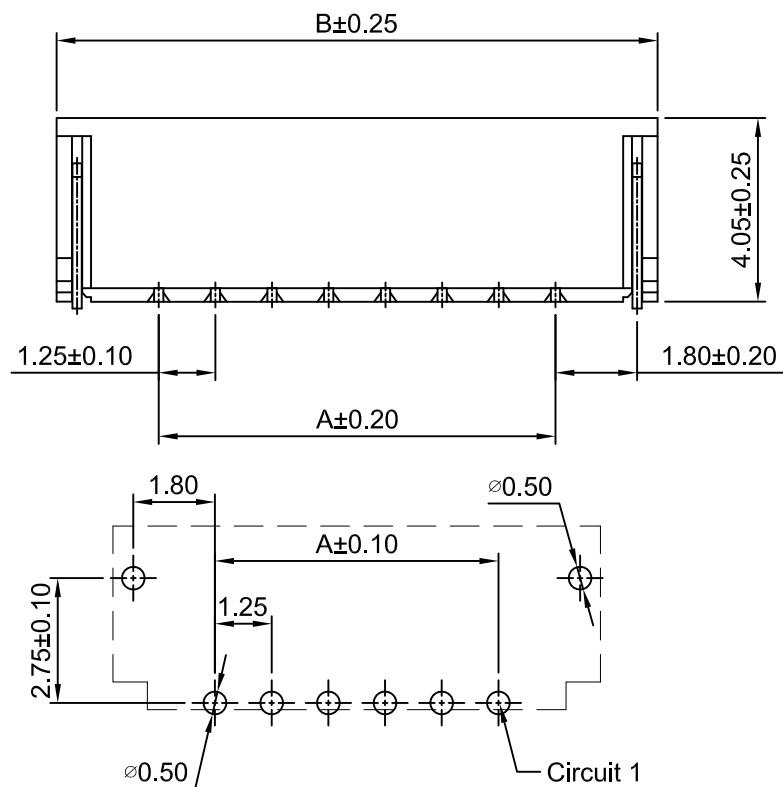


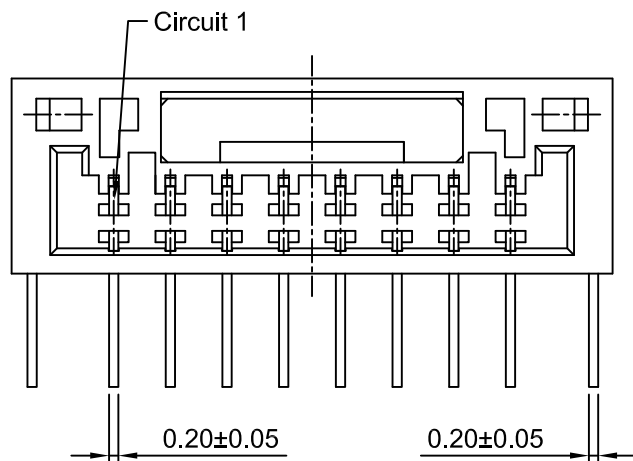

Ordering Information:

A1257WR-F-XP - ** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 9T,UL94V-0

GWT: Nylon 9T,UL94V-0,

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): Ivory

BK: Black

OR: Orange

TR: Tomato red

MG: Moss green

BL: Blue

LE: Light blue


LY: Lemon yellow

DPK: Dark pink

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

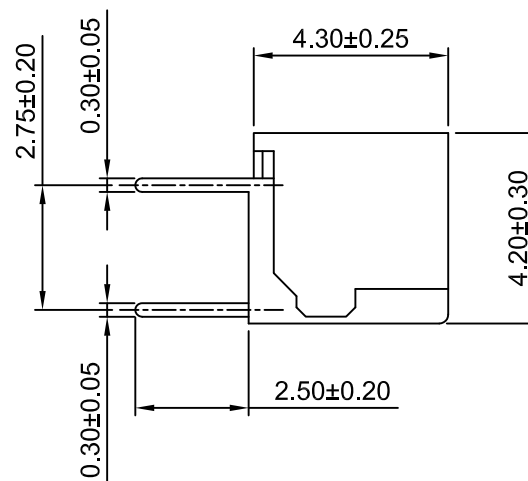

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 100V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Material: Nylon 9T,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1257WR-F-2P	1.25	5.75
A1257WR-F-3P	2.50	7.00
A1257WR-F-4P	3.75	8.25
A1257WR-F-5P	5.00	9.50
A1257WR-F-6P	6.25	10.75
A1257WR-F-7P	7.50	12.00
A1257WR-F-8P	8.75	13.25
A1257WR-F-9P	10.00	14.50
A1257WR-F-10P	11.25	15.75
A1257WR-F-11P	12.50	17.00
A1257WR-F-12P	13.75	18.25
A1257WR-F-13P	15.00	19.50
A1257WR-F-14P	16.25	20.75
A1257WR-F-15P	17.50	22.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.25mm PITCH 90° WAFER	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A1257WR-F-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	

A0	NEW RELEASE	2019.12.13
REV	DESCRIPTION	DATE