
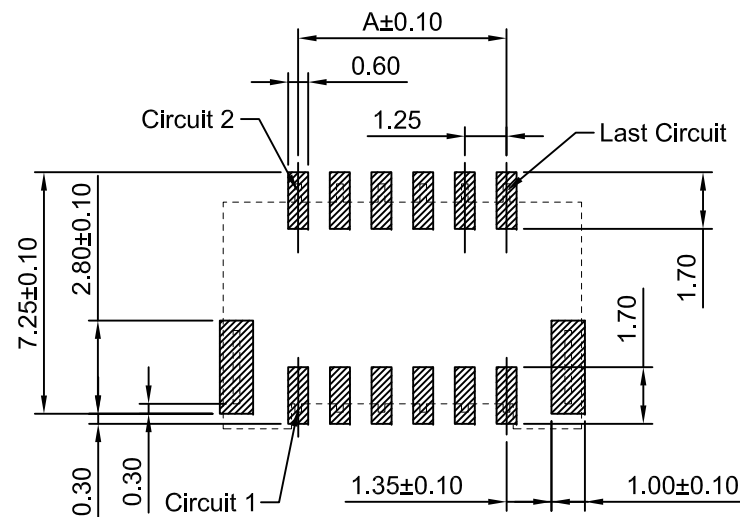



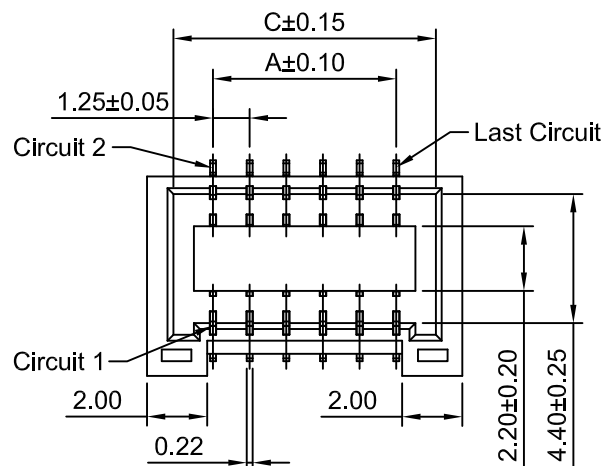

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

Ordering Information:

A1257WV-S-2xXP - *** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0(Ivory)

9T: Nylon 9T,UL94V-0 (see section 3 Color)

3.Color:

(Blank): Ivory

BK: Black

DPK: Dark pink

BL: Blue

OR: Orange

LY: Lemon yellow

LE: Light blue

TR: Tomato red

MG: Moss green


4.Finish:

(Blank): Tin over Nickel

G3: Gold over Nickel (Au:3u")

G15: Gold over Nickel (Au:15u",Mating area;Tin-plated other are)

G30: Gold over Nickel (Au:30u",Mating area;Tin-plated other are)



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.


Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1257WV-S-2x5P	5.00	9.50	7.70
A1257WV-S-2x6P	6.25	10.75	8.95
A1257WV-S-2x7P	7.50	12.00	10.20
A1257WV-S-2x8P	8.75	13.25	11.45
A1257WV-S-2x9P	10.00	14.50	12.70
A1257WV-S-2x10P	11.25	15.75	13.95
A1257WV-S-2x11P	12.50	17.00	15.20
A1257WV-S-2x12P	13.75	18.25	16.45
A1257WV-S-2x13P	15.00	19.50	17.70
A1257WV-S-2x14P	16.25	20.75	18.95
A1257WV-S-2x15P	17.50	22.00	20.20
A1257WV-S-2x16P	18.75	23.25	21.45
A1257WV-S-2x17P	20.00	24.50	22.70
A1257WV-S-2x18P	21.25	25.75	23.95
A1257WV-S-2x19P	22.50	27.00	25.20
A1257WV-S-2x20P	23.75	28.25	26.45

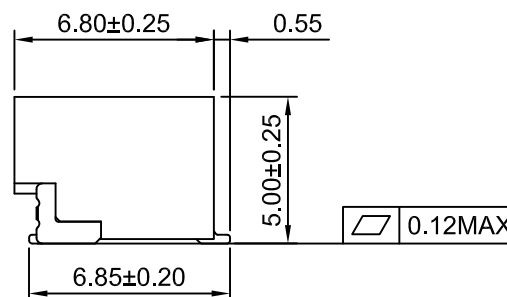

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	1.25mm PITCH RIGHT-ANGLE DUAL ROW WAFER -SMD TYPE
DRWN	CHKD	APPR	DRAWING NO.
Wenmin Luo	Diankui Wan	Jack Yin	A1257WV-S-2xXP
REV	DESCRIPTION	DATE	REV A2

A2	CHANGE THE DRAWING	2022.11.11
A1	CHANGE THE DRAWING	2022.01.15
A0	NEW RELEASE	2021.11.17
REV	DESCRIPTION	DATE

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION

