

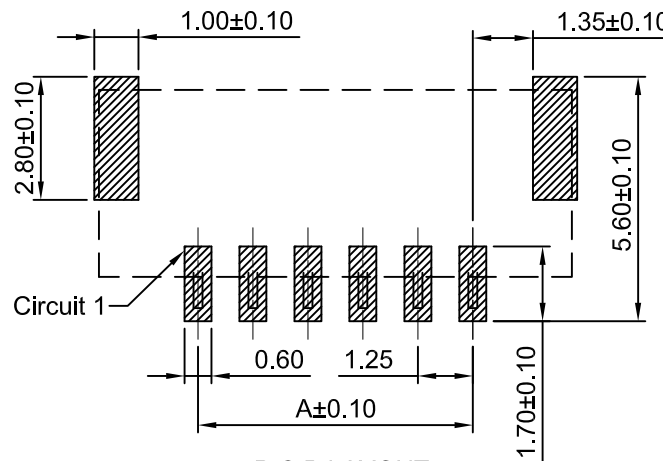
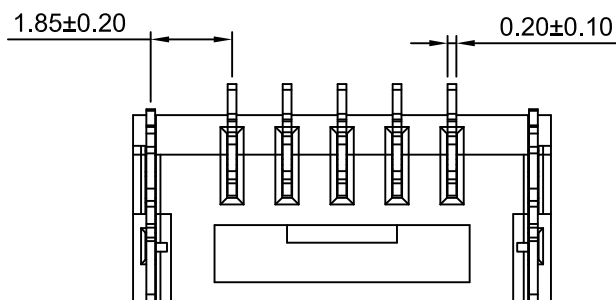
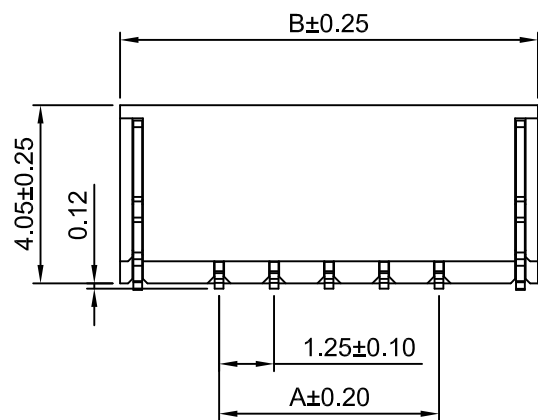
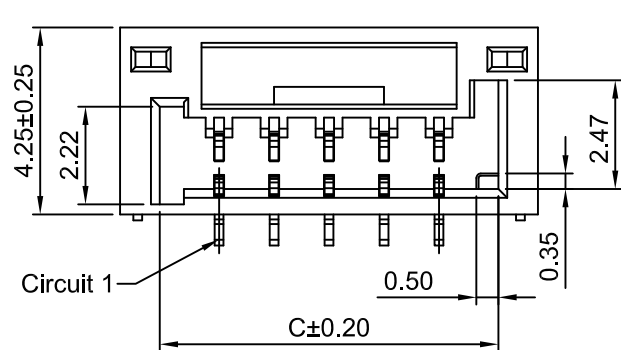




P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

A1257WVD-S-XP - **
1 2

1.Part NO.

2.Pin Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1u")

G3: Gold over Nickel(Au:3u")

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze

Solder tabs: Brass/Tin over Nickel

Material: Nylon 6T,UL94V-0(Gray)

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A1257WVD-S-2P	1.25	5.75	3.95
A1257WVD-S-3P	2.50	7.00	5.20
A1257WVD-S-4P	3.75	8.25	6.45
A1257WVD-S-5P	5.00	9.50	7.70
A1257WVD-S-6P	6.25	10.75	8.95
A1257WVD-S-7P	7.50	12.00	10.20
A1257WVD-S-8P	8.75	13.25	11.45
A1257WVD-S-9P	10.00	14.50	12.70
A1257WVD-S-10P	11.25	15.75	13.95
A1257WVD-S-11P	12.50	17.00	15.20
A1257WVD-S-12P	13.75	18.25	16.45
A1257WVD-S-13P	15.00	19.50	17.70
A1257WVD-S-14P	16.25	20.75	18.95
A1257WVD-S-15P	17.50	22.00	20.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.25mm PITCH VERTICAL SINGLE ROW WAFER - SMD TYPE	
DRN	CHK	APVD	DRAWING NO	
Chengbiao Ye	DianKui Wan	Jack Yin	A1257WVD-S-XP	
General Tolerance			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15			REV	
ANGLES ±1°			A3	

A3	MODIFY DRAWING	2023.07.05
A2	MODIFY DRAWING	2021.11.23
A1	ADD THE INFORMATION	2020.09.08
A0	NEW RELEASE	2016.09.08
REV	DESCRIPTION	DATE