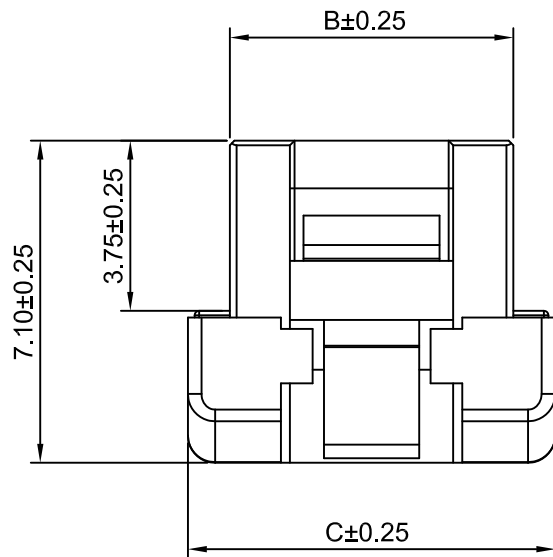
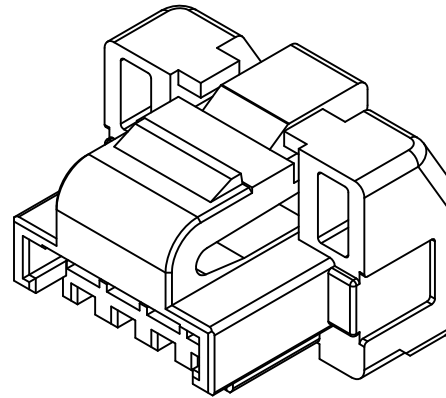
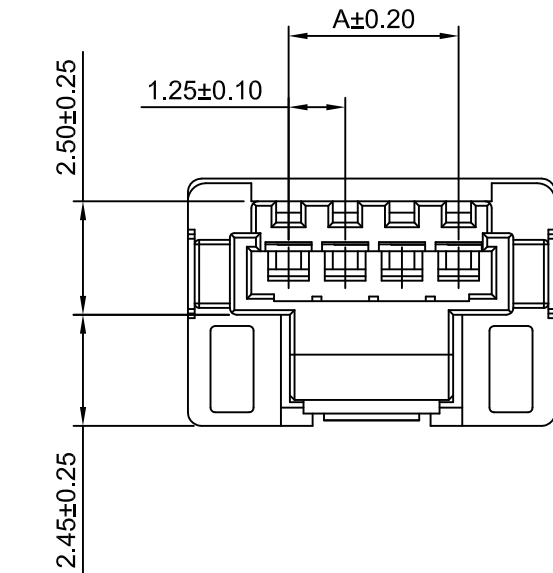


SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 40mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A1259H-2P	1.25	3.75	5.60
A1259H-3P	2.50	5.00	6.85
A1259H-4P	3.75	6.25	8.10
A1259H-5P	5.00	7.50	9.35
A1259H-6P	6.25	8.75	10.60
A1259H-7P	7.50	10.00	11.85
A1259H-8P	8.75	11.25	13.10
A1259H-9P	10.00	12.50	14.35
A1259H-10P	11.25	13.75	15.60
A1259H-11P	12.50	15.00	16.85
A1259H-12P	13.75	16.25	18.10
A1259H-13P	15.00	17.50	19.35
A1259H-14P	16.25	18.75	20.60
A1259H-15P	17.50	20.00	21.85

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	6:1	1 of 1	1.25mm PITCH HOUSING
DRN	CHK	APVD	
Dengchun Yi	DianKui Wan	Jack Yin	
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO
x,x±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°			A1259H-XP
A0	NEW RELEASE		
REV	DESCRIPTION	DATE	REV A0