



05P



15P



10P



25P

Ordering Information:





A1259HA-XP - **
1 2

1.Part No.

2.Material:

(blank) - NYLON66 94V-0

LCP - LCP 94V-0

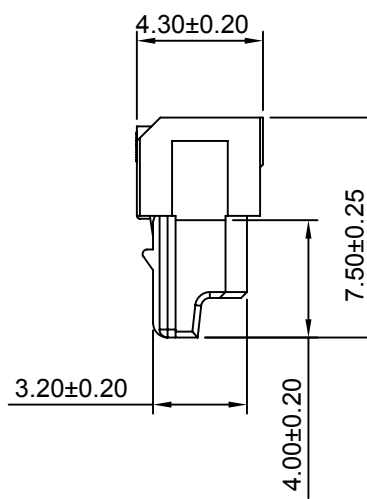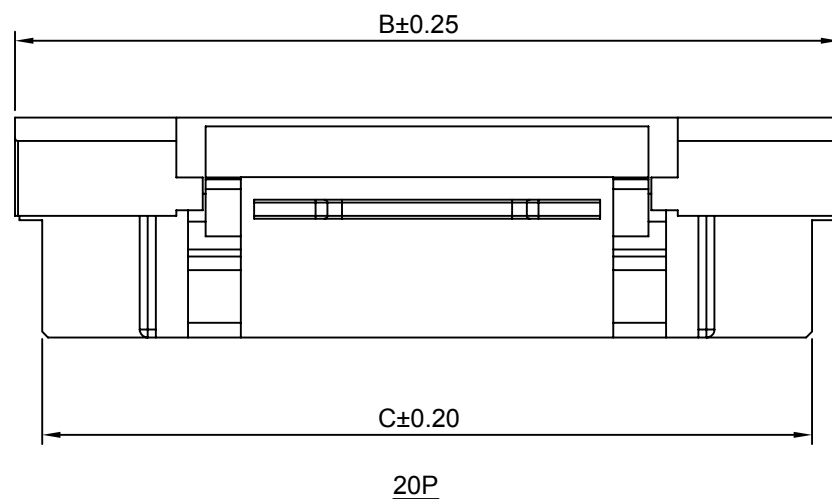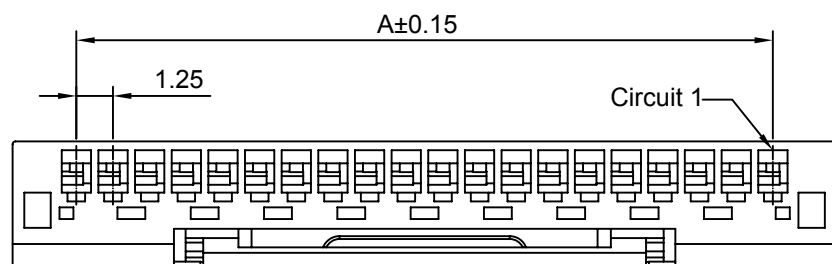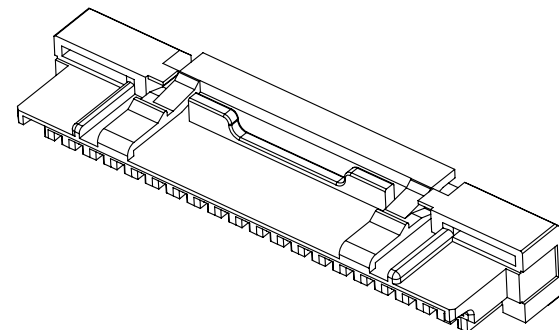

SPECIFICATIONS:

Current Rating: 1.5A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C ~ +130°C

Contact Resistance: ≤20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: NYLON66 94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
5P	5.00	9.35	7.50	20P	23.75	28.10	26.25
10P	11.25	15.60	13.75	25P	30.00	34.35	32.50
15P	17.50	21.85	20.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 4:1
Sheet: 1 of 1

Draw BY: LIZQ
Approved: GONGYB

General Tolerance

x.x≤0.25
x.xx≤0.20
x.xxx≤0.15



Title: 1.25mm PITCH
HOUSING

DRAW NO: A1259HA-XP
REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2014.07.23