

Ordering Information:

A1272WVM-2xXP - ***

1 2

1.Part No.

2.Finish:

(Blank): Gold over Nickel


G5: Gold over Nickel(Au:5u")

G10: Gold over Nickel(Au:10u")


G15: Gold over Nickel(Au:15u")

G30: Gold over Nickel(Au:30u")

T: Tin over Nickel





30P.50P

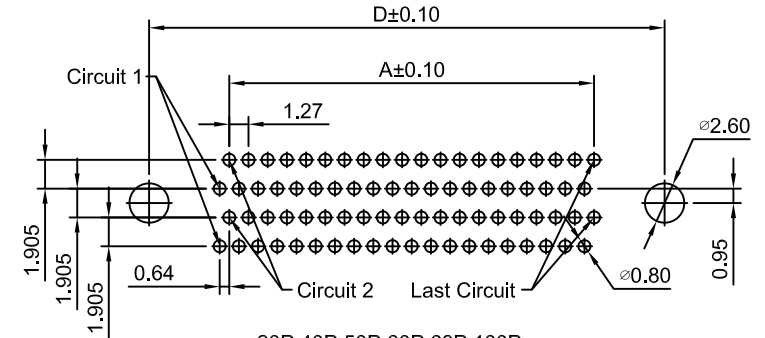

20P.40P.50P.60P.68P.100P

PCB LAYOUT
TOLERANCE: ± 0.05

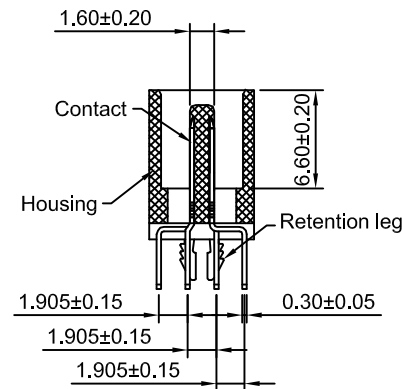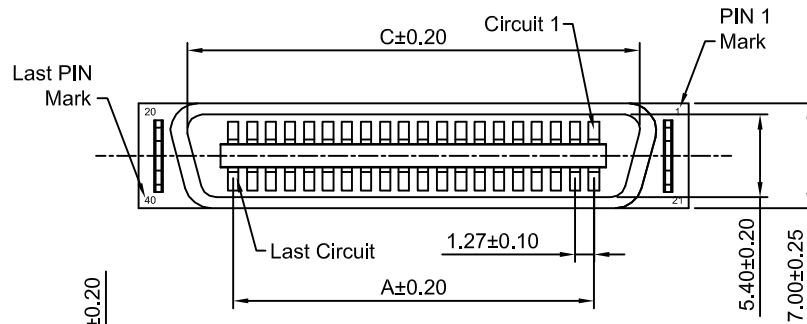

SPECIFICATIONS:

Current rating: 1A AC,DC

Voltage rating: 30V AC,DC

Temperature range: -40°C ~ +105°C

Contact resistance: 35mΩ Max.

Insulation resistance: 500MΩ Min.

Withstanding voltage: 500V AC/minute

Pin Material: Phosphor/Gold over Nickel

Housing Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A1272WVM-2x10P	11.43	24.05	17.53	21.40
A1272WVM-2x15P	17.78	30.40	23.88	27.75
A1272WVM-2x20P	24.13	36.75	30.23	34.10
A1272WVM-2x25P	30.48	43.10	36.58	40.45
A1272WVM-2x30P	36.83	49.45	42.93	46.80
A1272WVM-2x34P	41.91	54.53	48.01	51.88
A1272WVM-2x40P	49.53	62.13	55.63	59.50
A1272WVM-2x50P	62.23	74.85	68.33	72.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 1.27mm Pitch SCSI 180° DIP Male Type	
mm		2:1		1 of 4			
Draw By:		Approved :					
Diankui Wan		Jack Yin					
General Tolerance							
x.xx±0.25		PROJECT 					
x.xx±0.20							
x.xxx±0.15							
3		DRAW NO : A1272WVM-2xXP				REV A0	