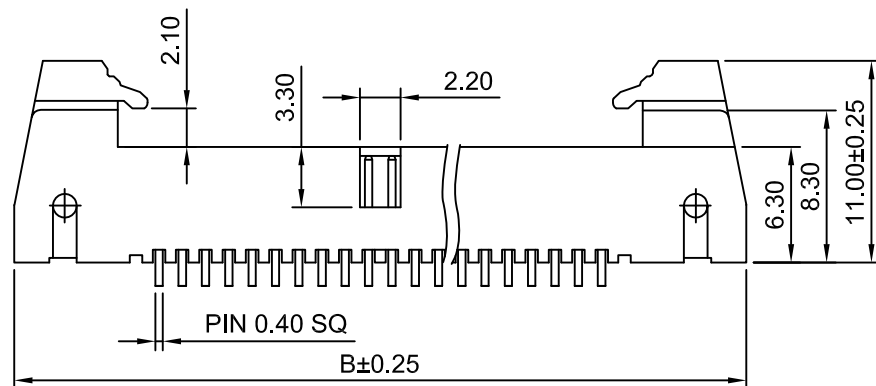
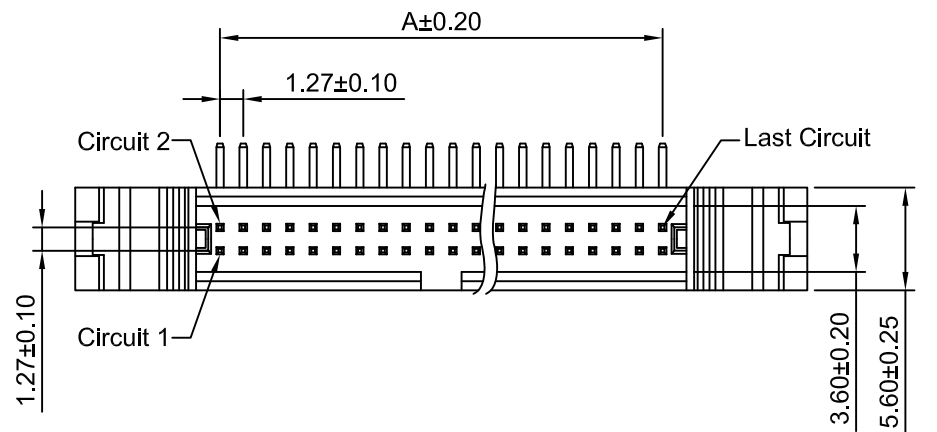


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A1276WRD-2xXP - *** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 6T+30%GF,UL94V-0(Black)

9T: Nylon 9T,UL94V-0(Black)

LCP:LCP,UL94V-0(Black)

3.Color:

(Blank):see section 2 material

BL: Blue GY: Gray

4.Finish:

(Blank): Gold over Nickel

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1276WRD-2x3P	2.54	18.31
A1276WRD-2x4P	3.81	19.58
A1276WRD-2x5P	5.08	20.85
A1276WRD-2x6P	6.35	22.12
A1276WRD-2x7P	7.62	23.39
A1276WRD-2x8P	8.89	24.66
A1276WRD-2x10P	11.43	27.20
A1276WRD-2x12P	13.97	29.74
A1276WRD-2x13P	15.24	31.01
A1276WRD-2x15P	17.78	33.55
A1276WRD-2x17P	20.32	36.09
A1276WRD-2x20P	24.13	39.90
A1276WRD-2x22P	26.67	42.44
A1276WRD-2x25P	30.48	46.25
A1276WRD-2x32P	39.37	55.14
A1276WRD-2x34P	41.91	57.68
A1276WRD-2x35P	43.18	58.95

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRAWN	CHKD	APPR	1.27mm PITCH Right angle Box Header	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1276WRD-2xXP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2023.03.03
REV	DESCRIPTION	DATE