
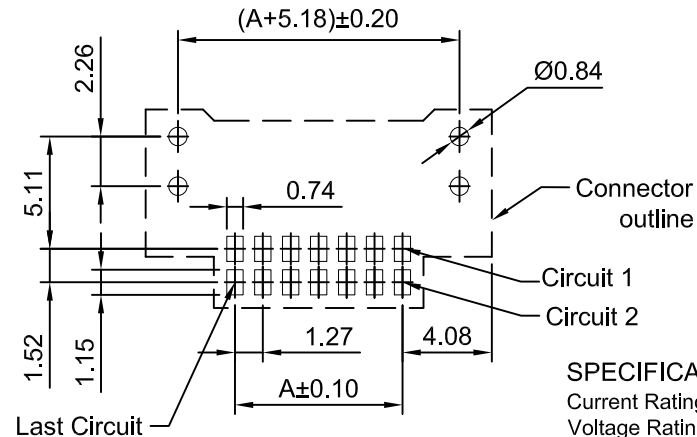


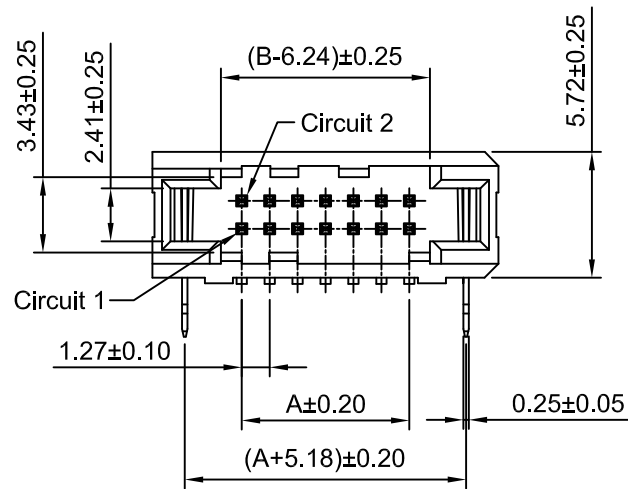



P.C.B LAYOUT
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating: 3.1A AC,DC (Max)
Voltage Rating: 313V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 938V AC/minute
Pin Material: Brass/Gold over Nickel
Material: LCP, UL94V-0 (Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	B		A	B
2x2P	1.27	9.42	2x14P	16.51	24.66
2x3P	2.54	10.69	2x15P	17.78	25.93
2x4P	3.81	11.96	2x14P	19.05	27.20
2x5P	5.08	13.23	2x15P	20.32	28.47
2x6P	6.35	14.50	2x14P	21.59	29.74
2x7P	7.62	15.77	2x15P	22.86	31.01
2x8P	8.89	17.04	2x14P	24.13	32.28
2x9P	10.16	18.31	2x15P	25.40	33.55
2x10P	11.43	19.58	2x14P	26.67	34.82
2x11P	12.70	20.85	2x15P	27.94	36.09
2x12P	13.97	22.12	2x14P	29.21	37.36
2x13P	15.24	23.39	2x15P	30.48	38.63

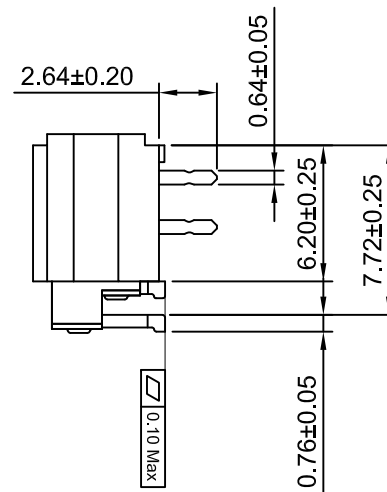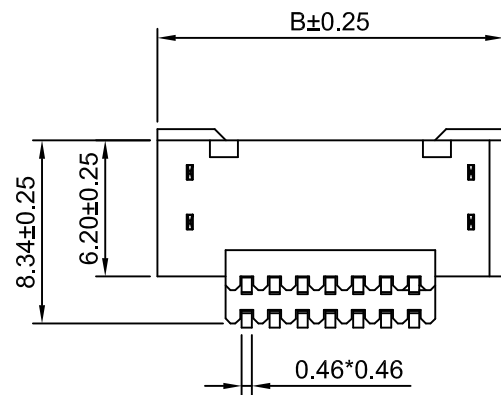

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	1.27mm PITCH RIGHT-ANGLE DUAL ROW WAFER
DRAWN	CHK'D	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A1276WRE-S-F-2xXP
A0	NEW RELEASE		2020.09.15
REV	DESCRIPTION	DATE	REV A0