
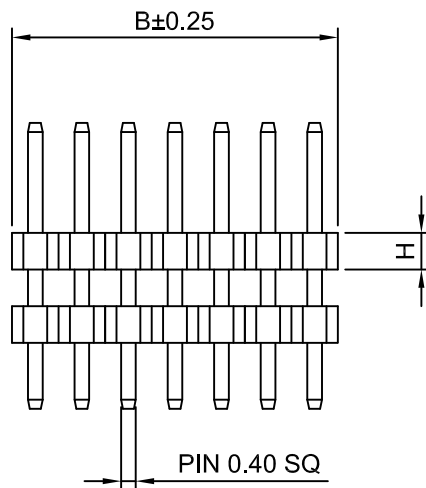
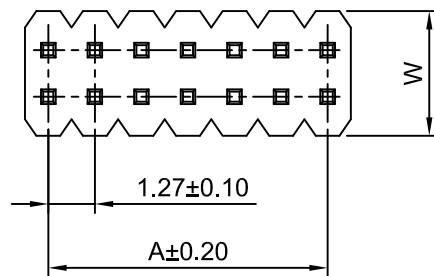


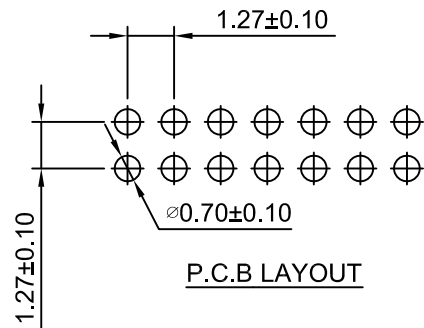

Ordering Information:

A1276WVA-2xXP - *** - *** - ***
1 2 3 4

1.Part No.

2.Size(H):

(Blank):1.00mm(W:3.40mm)

H15:1.50mm(W:3.40mm)

H20:2.00mm(W:3.00mm)

H25:2.50mm(W:3.00mm)

3.Material:

(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750°C


4.Finish:

(Blank):Gold over Nickel

G15 :Gold over Nickel(Au:15u")

G30 :Gold over Nickel(Au:30u")

T :Tin over Nickel

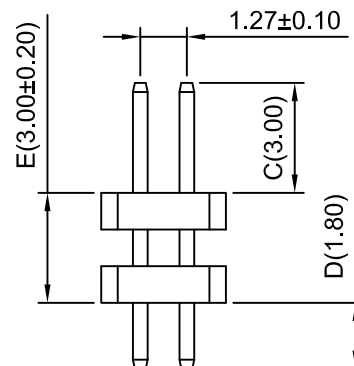

SPECIFICATIONS:

Current Rating: 1.0A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Gold over Nickel

Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
2x2P	1.27	2.54	2x15P	17.78	19.05	2x28P	34.29	35.56
2x3P	2.54	3.81	2x16P	19.05	20.32	2x29P	35.56	36.83
2x4P	3.81	5.08	2x17P	20.32	21.59	2x30P	36.83	38.10
2x5P	5.08	6.35	2x18P	21.59	22.86	2x31P	38.10	39.37
2x6P	6.35	7.62	2x19P	22.86	24.13	2x32P	39.37	40.64
2x7P	7.62	8.89	2x20P	24.13	25.40	2x33P	40.64	41.91
2x8P	8.89	10.16	2x21P	25.40	26.67	2x34P	41.91	43.18
2x9P	10.16	11.43	2x22P	26.67	27.94	2x35P	43.18	44.45
2x10P	11.43	12.70	2x23P	27.94	29.21	2x36P	44.45	45.72
2x11P	12.70	13.97	2x24P	29.21	30.48	2x37P	45.72	46.99
2x12P	13.97	15.24	2x25P	30.48	31.75	2x38P	46.99	48.26
2x13P	15.24	16.51	2x26P	31.75	33.02	2x39P	48.26	49.53
2x14P	16.51	17.78	2x27P	33.02	34.29	2x40P	49.53	50.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet
mm	3:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack YIn

Title :

1.27mm PITCH
180° DUAL ROW
PIN HEADER

General Tolerance	
A1	CHANGE THE DRAWING
A0	NEW RELEASE
REV	DESCRIPTION

PROJECT



DRAW NO : A1276WVA-2xXP

REV
A1