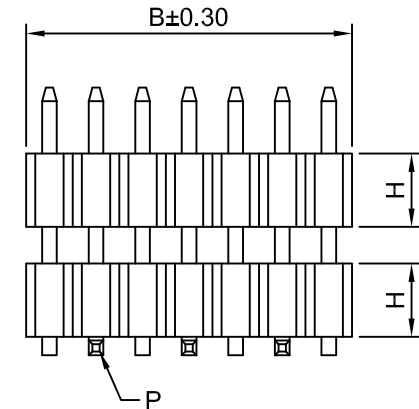
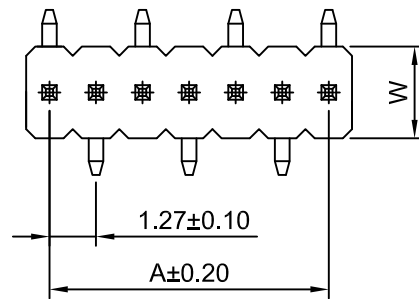


P.C.B LAYOUT

Ordering Information:
A1276WVA-XP-A - *** - ***
1 2 3

1.Part No.

2.Size(H):

(Blank):1.00mm(W:2.10mm,P:Pin 0.40 SQ)

H15:1.50mm(W:2.40mm,P:Pin 0.40 SQ)

H17:1.70mm(W:2.50mm,P:Pin 0.46 SQ)


H20:2.00mm(W:2.50mm,P:Pin 0.40 SQ)

H25:2.50mm(W:2.50mm,P:Pin 0.40 SQ)

3.Material:

(Blank):Nylon 6T,UL94V-0

GWT :Nylon 6T,UL94V-0 GWT 750℃

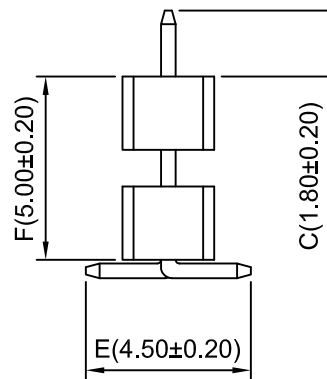

SPECIFICATIONS:

Current Rating:1A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material:Brass/Gold over Nickel

Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
2P	1.27	2.54	19P	22.86	24.13	35P	43.18	44.46
3P	2.54	3.81	20P	24.13	25.40	36P	44.45	45.72
4P	3.81	5.08	21P	25.40	26.67	37P	45.72	46.99
5P	5.08	6.35	22P	26.67	27.94	38P	46.99	48.26
6P	6.35	7.62	23P	27.94	29.21	39P	48.26	49.53
7P	7.62	8.89	24P	29.21	30.48	40P	49.53	50.80
8P	8.89	10.16	25P	30.48	31.75	41P	50.80	52.07
9P	10.16	11.43	26P	31.75	33.02	42P	52.07	53.34
10P	11.43	12.70	27P	33.02	34.29	43P	53.34	54.61
11P	12.70	13.97	28P	34.29	35.56	44P	54.61	55.88
12P	13.97	15.24	29P	35.56	36.83	45P	55.88	57.15
13P	15.24	16.51	30P	36.83	38.10	46P	57.15	58.42
14P	16.51	17.78	31P	38.10	39.37	47P	58.42	59.69
15P	17.78	19.05	32P	39.37	40.64	48P	59.69	60.96
16P	19.05	20.32	33P	40.64	41.91	49P	60.96	62.23
17P	20.32	21.59	34P	41.91	43.18	50P	62.23	63.50
18P	21.59	22.86						

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yln

General Tolerance

ANGLE±
x.xx±0.25 x.xx±0.20 x.xxx±0.15

Title : 1.27mm PITCH

180° Single Row
Wafer - SMT TYPE

DRAW NO : A1276WVA-S-XP-A

REV
A0

A0	NEW RELEASE	2017.10.20
REV	DESCRIPTION	DATE