
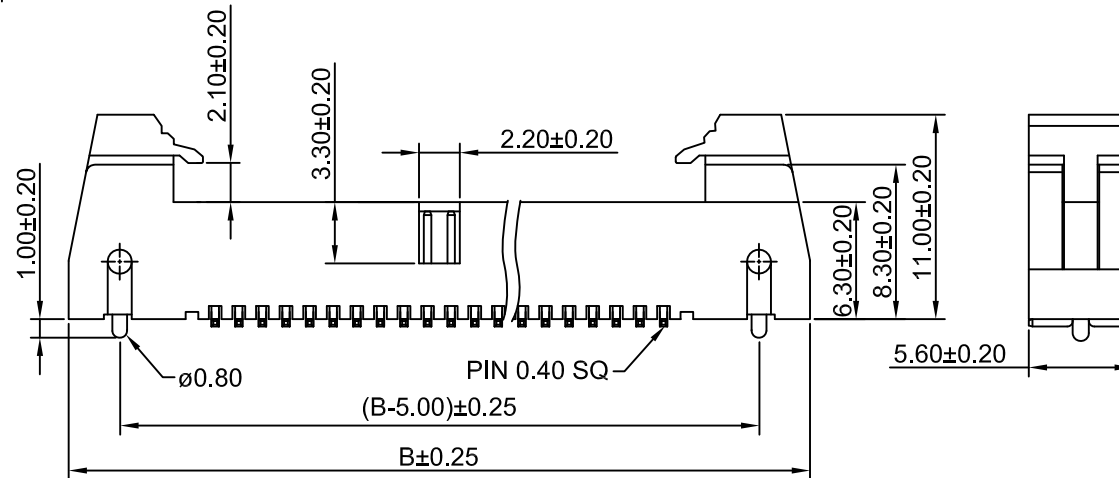
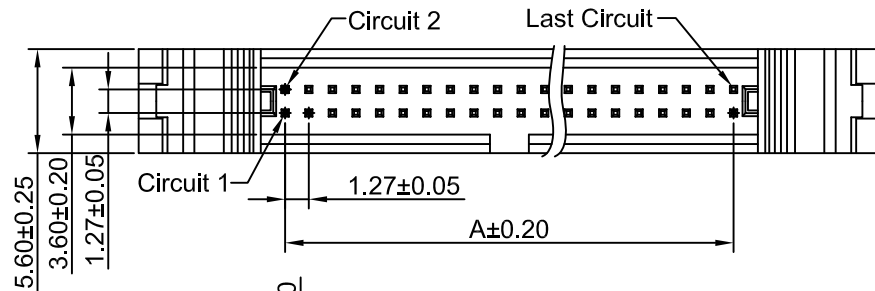


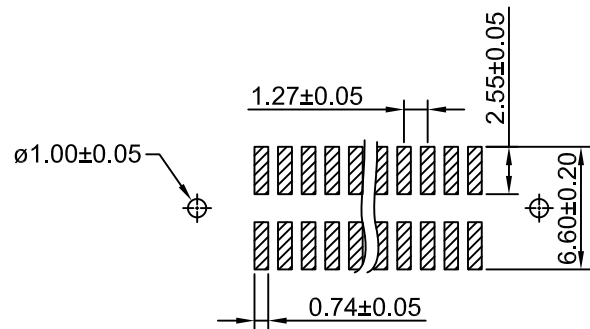

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon 6T+30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x3P	2.54	18.31	2x18P	21.59	37.36
2x4P	3.81	19.58	2x19P	22.86	38.63
2x5P	5.08	20.85	2x20P	24.13	39.90
2x6P	6.35	22.12	2x21P	25.40	41.17
2x7P	7.62	23.39	2x22P	26.67	42.44
2x8P	8.89	24.66	2x23P	27.94	43.71
2x9P	10.16	25.93	2x24P	29.21	44.98
2x10P	11.43	27.20	2x25P	30.48	46.25
2x11P	12.70	28.47	2x26P	31.75	47.52
2x12P	13.97	29.74	2x27P	33.02	48.79
2x13P	15.24	31.01	2x28P	34.29	50.06
2x14P	16.51	32.28	2x29P	35.56	51.33
2x15P	17.78	33.55	2x30P	36.83	52.60
2x16P	19.05	34.82	2x31P	38.10	53.87
2x17P	20.32	36.09	2x32P	39.37	55.14

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack Yin

Title :
**1.27mm Pitch
180° Box Header With Foot
-SMT Type**

General Tolerance		
A1	CHANGE THE DATA SHEET	2019.02.27
A0	NEW RELEASE	2018.08.25
REV	DESCRIPTION	DATE



DRAW NO : A1276WVD-S-F-2xXP

REV
A1