

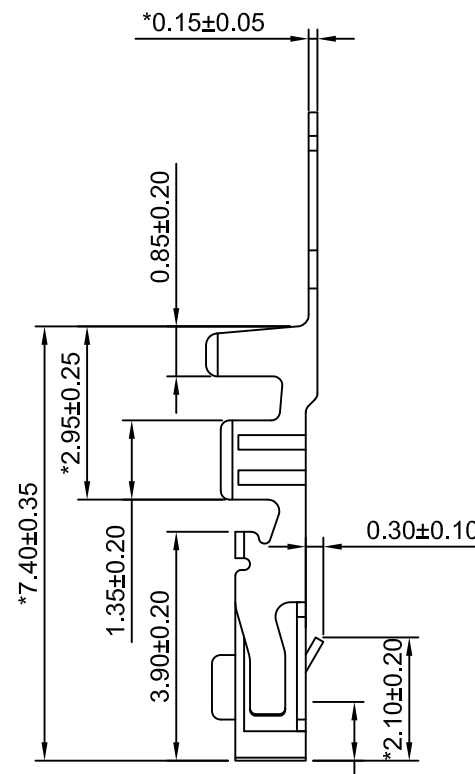
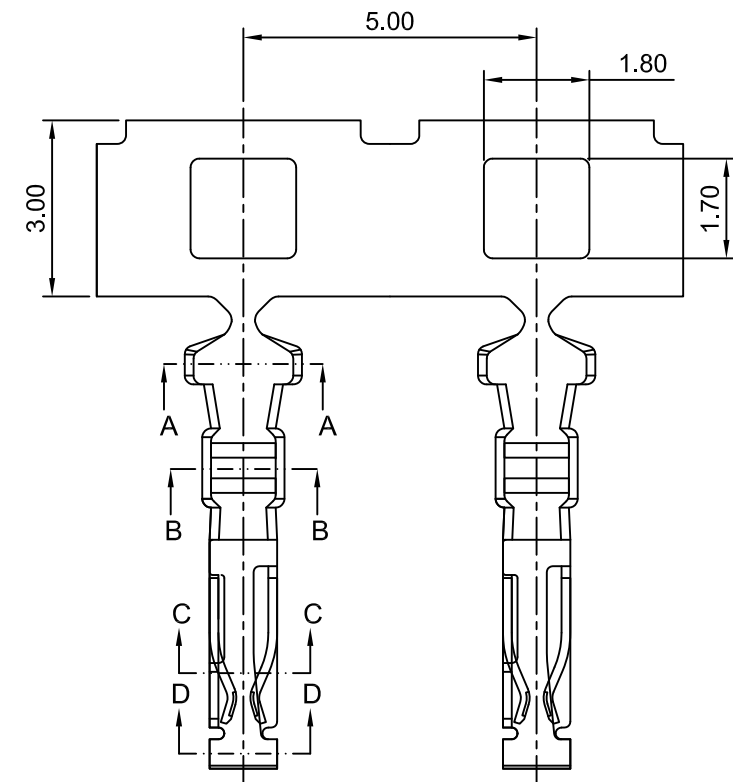


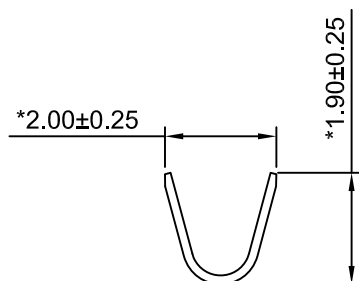


技术要求:


- 1.*尺寸为重点管控尺寸
- 2.产品表面无脏污、模痕、压伤、变形、氧化、漏镀、露铜等
- 3.未标注圆角均为R0.5,毛刺0.03mm Max
- 4.未标注公差按一般尺寸公差标注执行
- 5.料带弯曲度控制:Max. 5/1000.
- 6.镀层要求: 镍底镀锡/镀金
Au:1μin/3μin/10μin/15μin/30μin
Sn:80μin Min.
Ni :30μin Min.

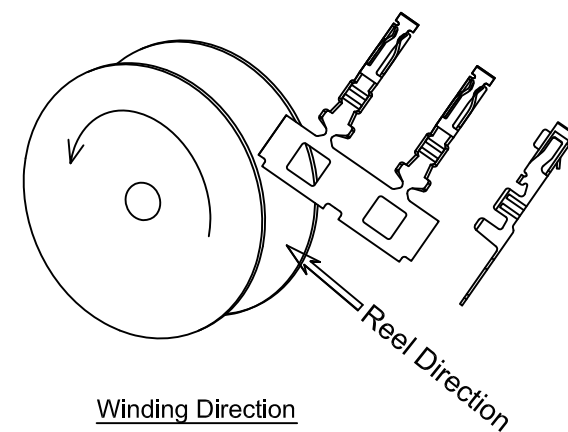


SEC:A-A

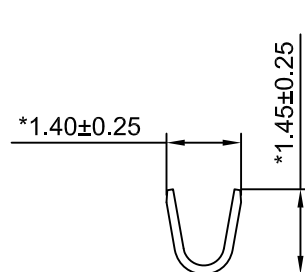

SEC:B-B



SEC:C-C

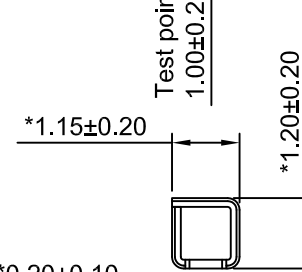

SEC:D-D

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A1501-TP-G	AWG#24-#28	0.76~1.30mm	Phosphor Bronze	Tin over Nickel	15,000 PCS
A1501-GP-G	AWG#24-#28	0.76~1.30mm	Phosphor Bronze	Gold over Nickel	15,000 PCS

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 1.50mm PITCH CRIMP TERMINAL	
mm	8:1	1 of 1		
DRAWN	CHK'D	APPR		
Wenmin Luo	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
			A1501-T-G	