


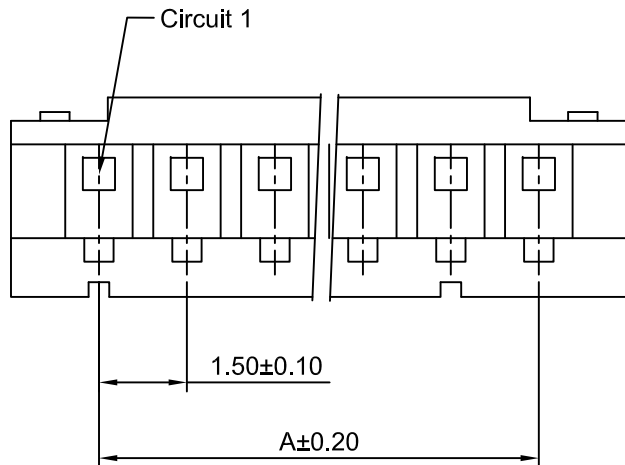


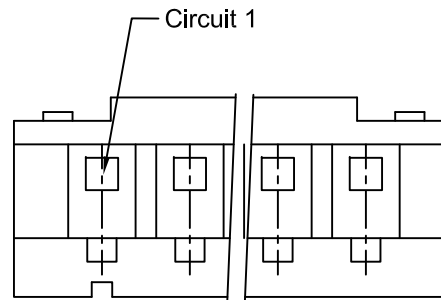

6P~14P

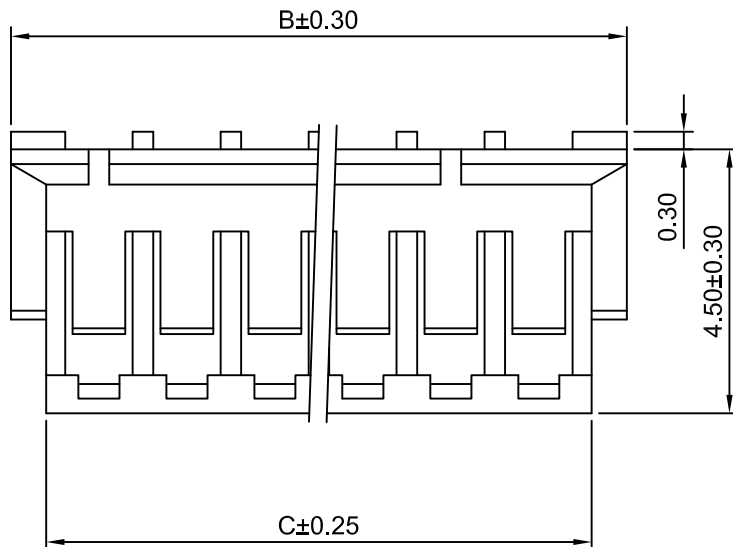

2P~5P

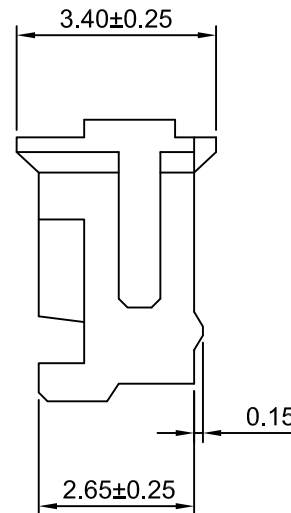

Ordering Information:

A1501H-XP - ***
1 2

1.Part NO.


2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.



SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501H-2P	1.50	4.50	3.30
A1501H-3P	3.00	6.00	4.80
A1501H-4P	4.50	7.50	6.30
A1501H-5P	6.00	9.00	7.80
A1501H-6P	7.50	10.50	9.30
A1501H-7P	9.00	12.00	10.80
A1501H-8P	10.50	13.50	12.30
A1501H-9P	12.00	15.00	13.80
A1501H-10P	13.50	16.50	15.30
A1501H-11P	15.00	18.00	16.80
A1501H-12P	16.50	19.50	18.30
A1501H-13P	18.00	21.00	19.80
A1501H-14P	19.50	22.50	21.30
A1501H-15P	21.00	24.00	22.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1	1.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A1501H-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A3	

A3	CHANGE THE DRAWING	2021.12.08
A2	CHANGE THE DRAWING	2021.03.17
A1	CHANGE CURRENT RATING	2019.02.18
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE