

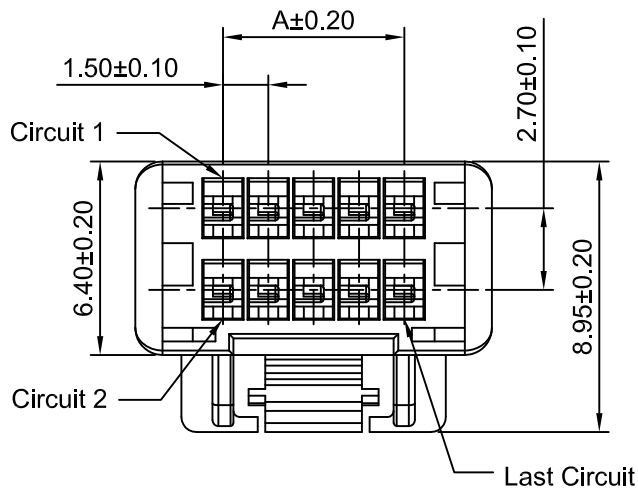
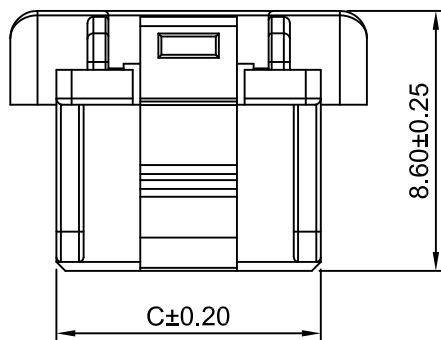



2x10P~2x17P



2x4P~2x5P

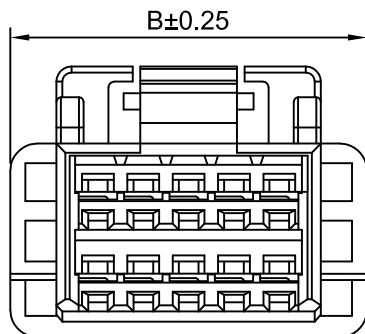

2x6P~2x9P



Ordering Information:

A1501HA-2xXP - ***
1 2

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 2A AC,DC (MAX)

Voltage Rating: 100V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $500\text{M}\Omega$ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501HA-2x4P	4.50	10.30	7.25
A1501HA-2x5P	6.00	11.80	8.75
A1501HA-2x6P	7.50	13.30	10.25
A1501HA-2x7P	9.00	14.80	11.75
A1501HA-2x8P	10.50	16.30	13.25
A1501HA-2x9P	12.00	17.80	14.75
A1501HA-2x10P	13.50	19.30	16.25
A1501HA-2x11P	15.00	20.80	17.75
A1501HA-2x12P	16.50	22.30	19.25
A1501HA-2x13P	18.00	23.80	20.75
A1501HA-2x14P	19.50	25.30	22.25
A1501HA-2x15P	21.00	26.80	23.75
A1501HA-2x16P	22.50	28.30	25.25
A1501HA-2x17P	24.00	29.80	26.75

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1	1.50mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV A1
x.xx±0.25			A1501HA-2xXP		
x.xx±0.20					
x.xx±0.15					
ANGLES ±1°					
A1	MODIFY DRAWING	2022.10.20	REV A1		
A0	NEW RELEASE	2020.12.29			
REV	DESCRIPTION	DATE			