

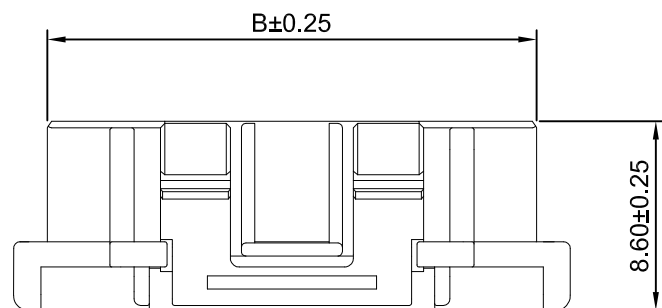
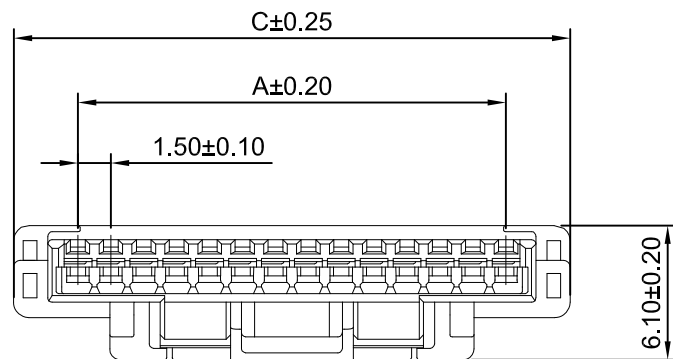



2P~3P



4P~5P



6P~15P

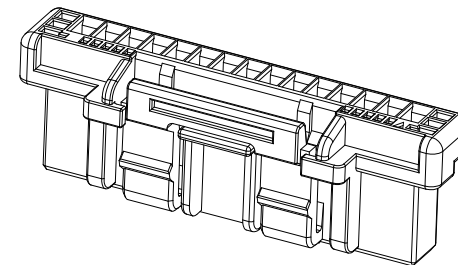

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0,Halogen Free(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.50	4.25	7.30	9P	12.00	14.75	17.80
3P	3.00	5.75	8.80	10P	13.50	16.25	19.30
4P	4.50	7.25	10.30	11P	15.00	17.75	20.80
5P	6.00	8.75	11.80	12P	16.50	19.25	22.30
6P	7.50	10.25	13.30	13P	18.00	20.75	23.80
7P	9.00	11.75	14.80	14P	19.50	22.25	25.30
8P	10.50	13.25	16.30	15P	21.00	23.75	26.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.50mm PITCH HOUSING	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1501HA-XP-66-HF	REV A3
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
				

A3	CHANGE THE DRAWING	2023.02.02
A2	CHANGE THE CURRENT RATING	2019.02.14
A1	CHANGE THE DRAWING	2015.05.13
A0	CHANGE OF DRAWINGS	2013.04.17
REV	DESCRIPTION	DATE