

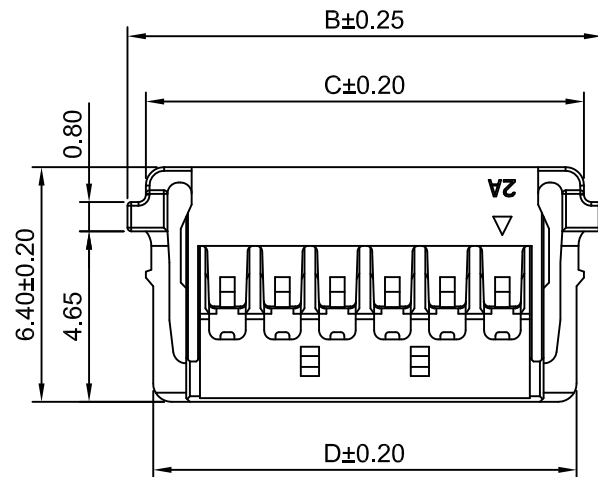





Circuit 1

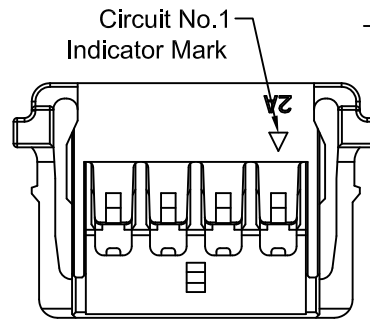

5P~12P



2P~4P

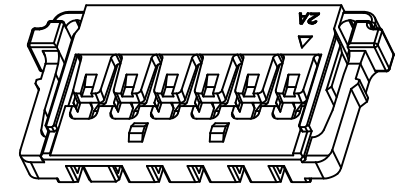

SPECIFICATIONS:

Current Rating: 3.5A AC,DC (AWG #24)

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			
	A	B	C	D
A1501HB-2P	1.50	6.95	5.95	5.55
A1501HB-3P	3.00	8.45	7.45	7.05
A1501HB-4P	4.50	9.95	8.95	8.55
A1501HB-5P	6.00	11.45	10.45	10.05
A1501HB-6P	7.50	12.95	11.95	11.55
A1501HB-7P	9.00	14.45	13.45	13.05
A1501HB-8P	10.50	15.95	14.95	14.55
A1501HB-9P	12.00	17.45	16.45	16.05
A1501HB-10P	13.50	18.95	17.95	17.55
A1501HB-11P	15.00	20.45	19.45	19.05
A1501HB-12P	16.50	21.95	20.95	20.55

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2020.10.20
A4	ADD THE DRAWING OF 2P~4P	2020.03.06
A3	CHANGE THE DRAWING	2019.06.14
A2	CHANGE THE CURRENT RATING	2019.02.18
A1	MODIFY DRAWING	2017.09.20
A0	NEW RELEASE	2013.04.17
REV	DESCRIPTION	DATE

	Unit	Scale	Sheet	TITLE 1.50mm PITCH HOUSING	
0	mm	5:1	1 of 1		
6	DRWN	CHK'D	APPR		
4	Dengchun Yi	Dlankul Wan	Jack Yin	DRAWING NO. A1501HB-XP	
8	General Tolerances		THIRD ANGLE PROJECTION		
0	x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
7				REV A5	