





2x4P

2x2P~2x3P

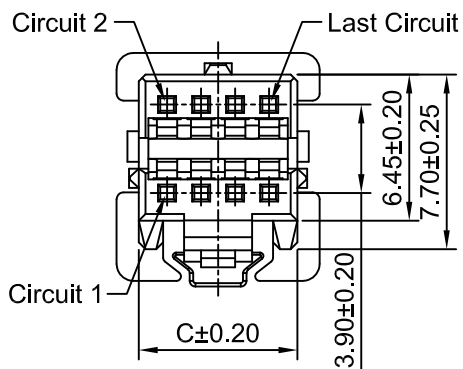

2x2P

2x3P

2x5P-2x8P

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Housing Material: PA 66+30%GF,UL94V-0(Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A1501HG-2x2P	1.50	6.00	4.40	4.85
A1501HG-2x3P	3.00	7.50	5.90	6.35
A1501HG-2x4P	4.50	9.00	7.00	7.85
A1501HG-2x5P	6.00	10.50	8.50	9.35
A1501HG-2x6P	7.50	12.00	10.00	10.85
A1501HG-2x7P	9.00	13.50	11.50	12.35
A1501HG-2x8P	10.50	15.00	13.00	13.85

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	1.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
x,x±0.25	x,x,x±0.20	x,x,x,x±0.15		
ANGLES ±1°				
A0	NEW RELEASE	2021.08.27		
REV	DESCRIPTION	DATE		

A1501HG-2xXP

REV
A0