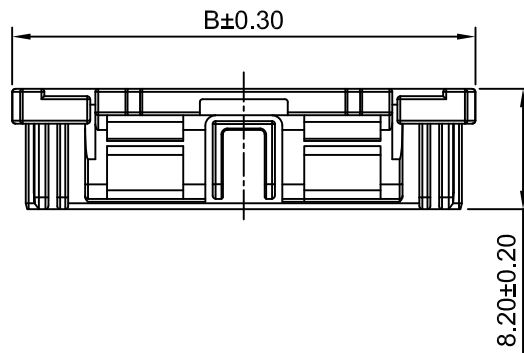


Ordering Information:

A1501HI-2xXP - *** - **
1 2 3



- Part NO.
- Color & Style.:
NAT: Natural(White), KEY A
BK: Black, KEY B
- Packing:
(Blank): Bag

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Material: PBT,UL94V-0

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	6.00	12.10	2x13P	18.00	24.10
2x6P	7.50	13.60	2x14P	19.50	25.60
2x7P	9.00	15.10	2x15P	21.00	27.10
2x8P	10.50	16.60	2x16P	22.50	28.60
2x9P	12.00	18.10	2x17P	24.00	30.10
2x10P	13.50	19.60	2x18P	25.50	31.60
2x11P	15.00	21.10	2x19P	27.00	33.10
2x12P	16.50	22.60	2x20P	28.50	34.60

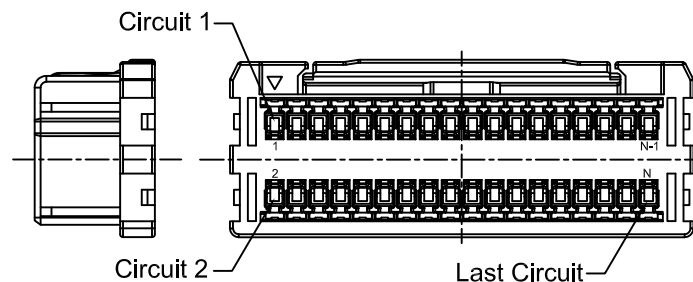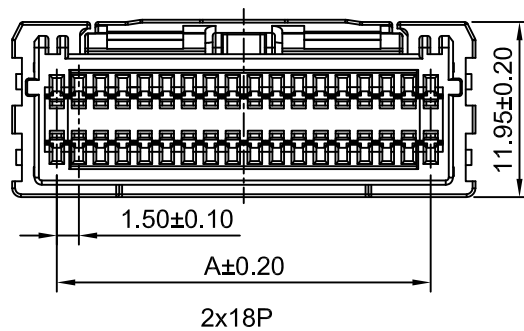


CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 2			
DRAWN	CHK'D	APPR'D	1.50mm PITCH DUAL ROW HOUSING		
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
A0	NEW RELEASE	2025.01.17	A1501HI-2xXP		A0
REV	DESCRIPTION	DATE			

COLOR KEY FIGURATION

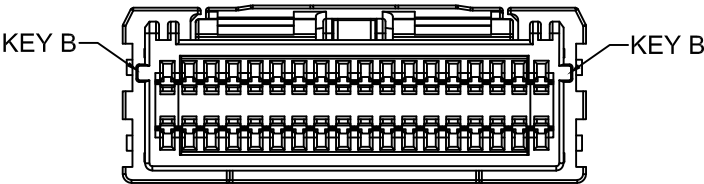


Natural

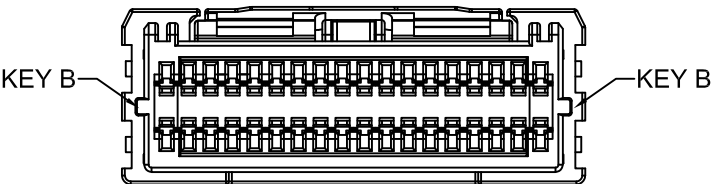


Black


THICKNESS REDUCTION PART(HATCHING AREA)

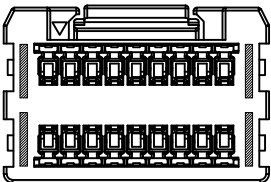

ODD CAVITY
2x5P~2x9P

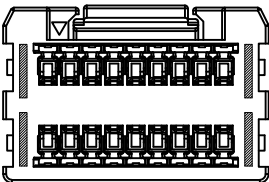

EVEN CAVITY
2x5P~2x9P

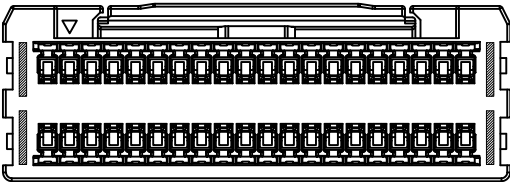

COMMON WITH ODD&EVEN CAVITY
2x10P~2x20P

A0	NEW RELEASE	2025.01.17
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE 1.50mm PITCH DUAL ROW HOUSING	
Unit	Scale	Sheet		
mm	2:1	2 of 2		
DRAWN	CHK'D	APPR'D	DRAWING NO. A1501HI-2xXP	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	REV A0	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				