

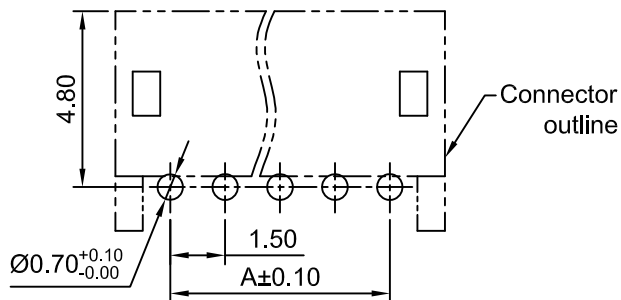
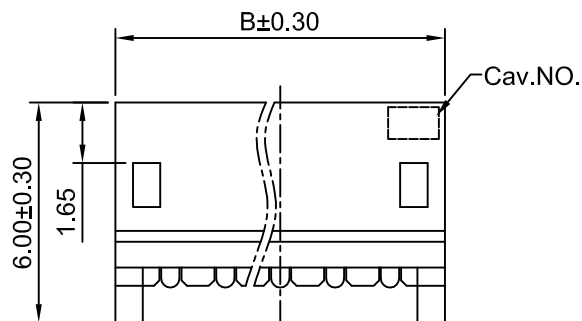


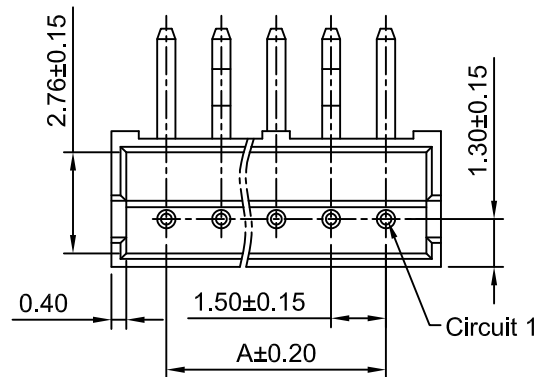

P.C.B LAYOUT
TOLERANCE:±0.05

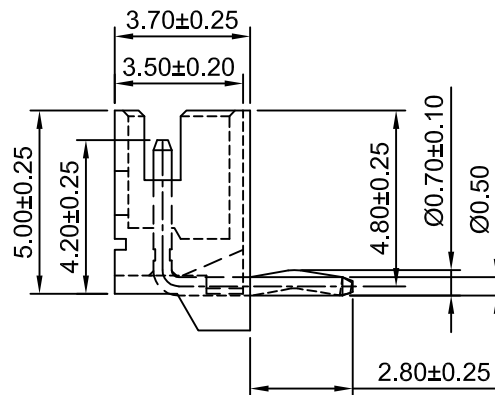

Ordering Information:

A1501WR-XP - ** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-0(Ivory)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank):see section 2 material

BK:Black RD:Red


BL:Blue GN:Green

GY:Gray YL:Yellow

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel



SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1501WR-2P	1.50	4.50
A1501WR-3P	3.00	6.00
A1501WR-4P	4.50	7.50
A1501WR-5P	6.00	9.00
A1501WR-6P	7.50	10.50
A1501WR-7P	9.00	12.00
A1501WR-8P	10.50	13.50
A1501WR-9P	12.00	15.00
A1501WR-10P	13.50	16.50
A1501WR-11P	15.00	18.00
A1501WR-12P	16.50	19.50
A1501WR-13P	18.00	21.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet
mm	5:1	1 of 2
DRAWN	CHKD	APPR
Haisen Li	Diankui Wan	Jack Yin

TITLE
**1.50mm PITCH
RIGHT-ANGLE WAFER**


General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25	x.xx±0.20	
x.x±0.15	x.x±0.10	
ANGLES ±1°		

DRAWING NO.	REV
A1501WR-XP	A0


REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10




2P



3P



4P

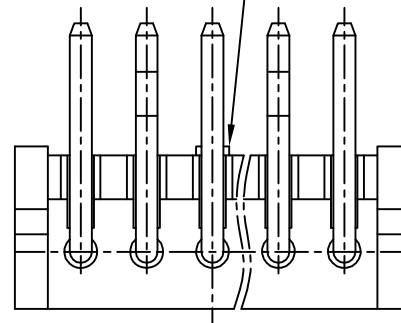

5P~13P

5P~6P 1RIB
7P~13P 2RIBs

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 1.50mm PITCH RIGHT-ANGLE WAFER
mm	6:1	2 of 2	
DRAWN	CHKD	APPR	
Haisen Li	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1501WR-XP
x,xx±0,25 x,xxx±0,20 x,xxxx±0,15 ANGLES ±1°			
REV	DESCRIPTION	DATE	REV A0

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE