
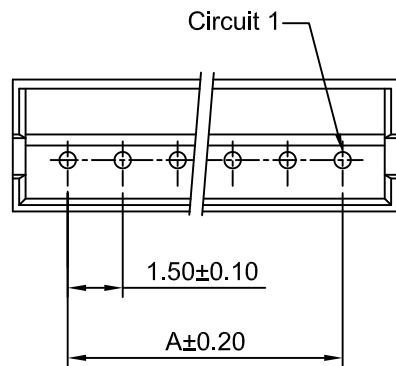
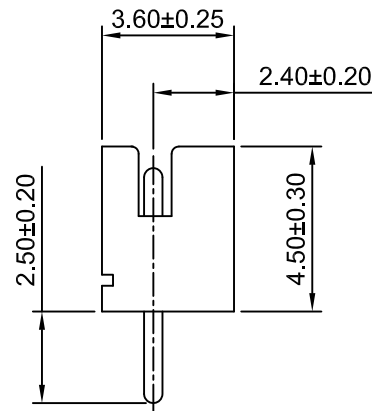
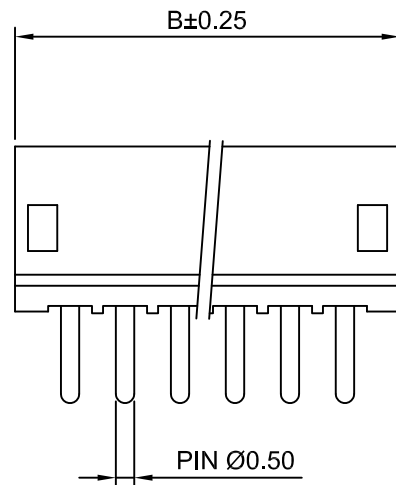


P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 46,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	4.50	8P	10.50	13.50
3P	3.00	6.00	9P	12.00	15.00
4P	4.50	7.50	10P	13.50	16.50
5P	6.00	9.00	11P	15.00	18.00
6P	7.50	10.50	12P	16.50	19.50
7P	9.00	12.00	13P	18.00	21.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		5:1		1 of 1			
DRAWN		CHK'D		APPR		1.50mm Pitch Vertical Wafer	
Chengbiao Ye		Djankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A1501WV-XP-46	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
						REV A3	

A3	CHANGE THE DRAWING	2023.02.27
A2	CHANGE THE CURRENT RATING	2019.02.26
A1	CHANGE THE DRAWING	2019.01.10
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE