


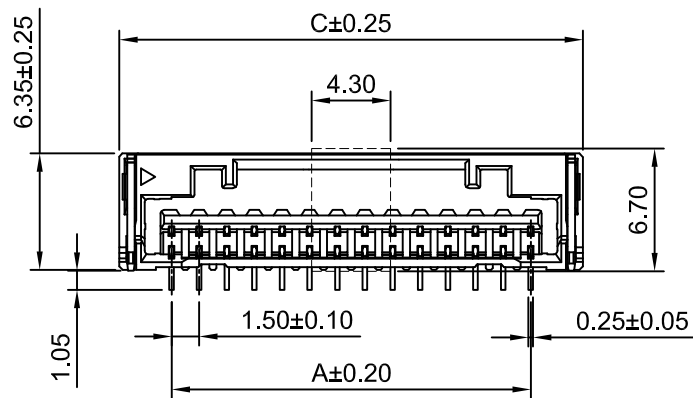



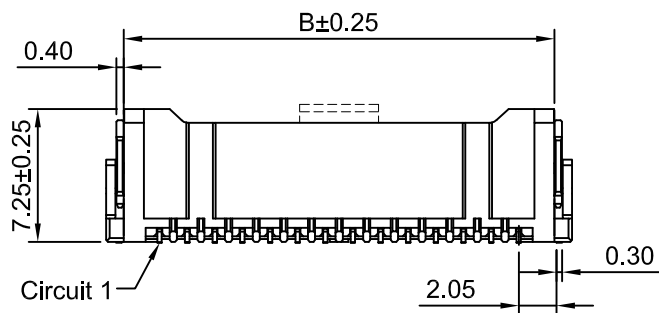

6P~15P

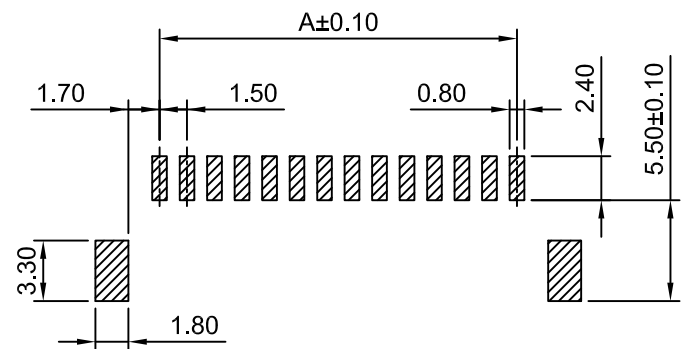

2P~5P



P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A1501WVA-S-XP - **
1 2

1.Part NO.

2.Material:

(blank): LCP,UL94V-0

9T: Nylon 9T,UL94V-0

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Solder Tabs Material: Brass/Tin over Nickel

Wafer Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501WVA-S-2P	1.50	5.50	7.30
A1501WVA-S-3P	3.00	7.00	8.80
A1501WVA-S-4P	4.50	8.50	10.30
A1501WVA-S-5P	6.00	10.00	11.80
A1501WVA-S-6P	7.50	11.50	13.30
A1501WVA-S-7P	9.00	13.00	14.80
A1501WVA-S-8P	10.50	14.50	16.30
A1501WVA-S-9P	12.00	16.00	17.80
A1501WVA-S-10P	13.50	17.50	19.30
A1501WVA-S-11P	15.00	19.00	20.80
A1501WVA-S-12P	16.50	20.50	22.30
A1501WVA-S-13P	18.00	22.00	23.80
A1501WVA-S-14P	19.50	23.50	25.30
A1501WVA-S-15P	21.00	25.00	26.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.50mm PITCH 180° WAFER - SMD TYPE	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1501WVA-S-XP	REV A2
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°				
				

A2	CHANGE THE CAP	2020.09.18
A1	CHANGE THE DRAWING	2020.05.07
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE