

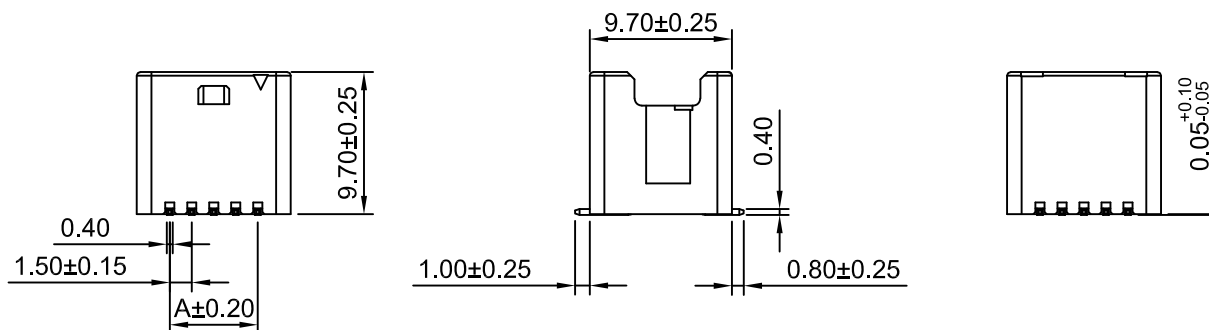
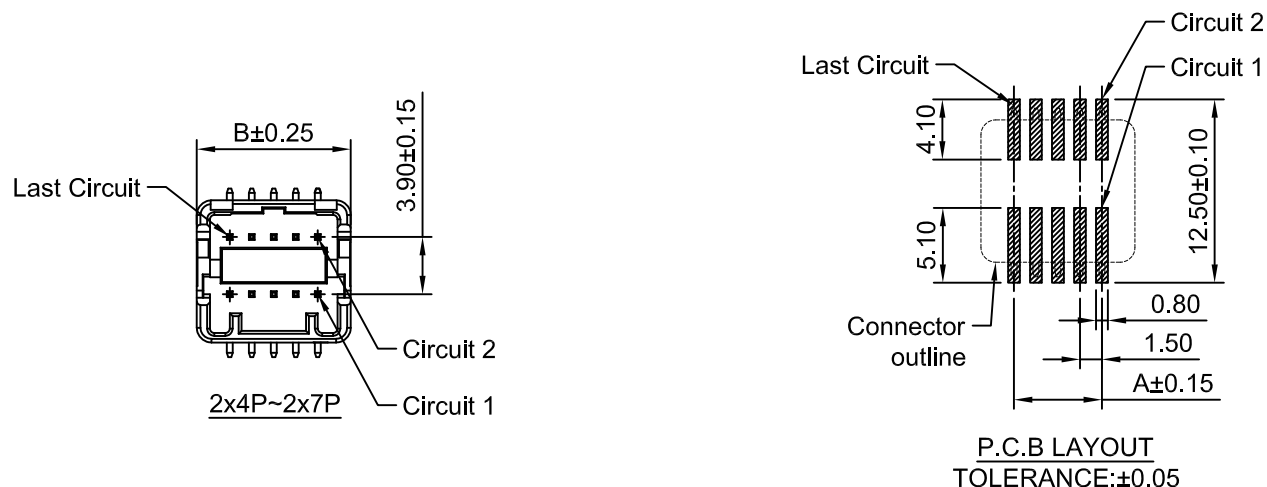





2x2P



2x3P



2x8P



SPECIFICATIONS:

Current Rating: 2A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance: $10\text{m}\Omega$ Max
 Insulation Resistance: $500\text{M}\Omega$ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin over Nickel
 Material: LCP UL94V-0(Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1501WVG-S-2x2P	1.50	6.00
A1501WVG-S-2x3P	3.00	7.50
A1501WVG-S-2x4P	4.50	9.00
A1501WVG-S-2x5P	6.00	10.50
A1501WVG-S-2x6P	7.50	12.00
A1501WVG-S-2x7P	9.00	13.50
A1501WVG-S-2x8P	10.50	15.00

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	1.50mm PITCH VERTICAL DUAL ROW WAFER -SMD TYPE		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25			A1501WVG-S-2xXP		A0
x.xxx±0.20					
x.xxxx±0.15					
ANGLES ±1°					