
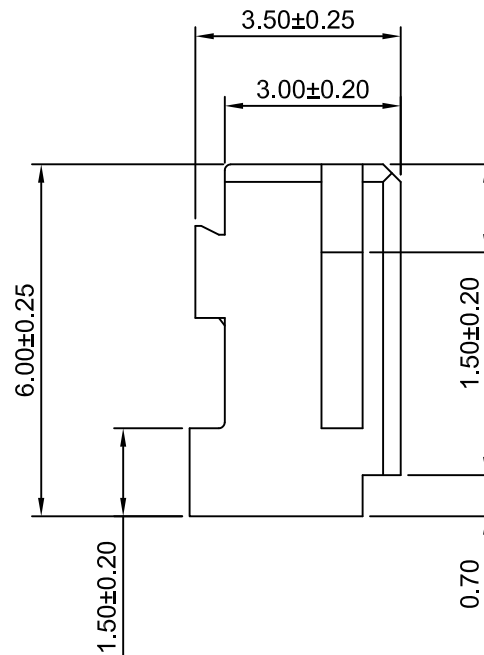
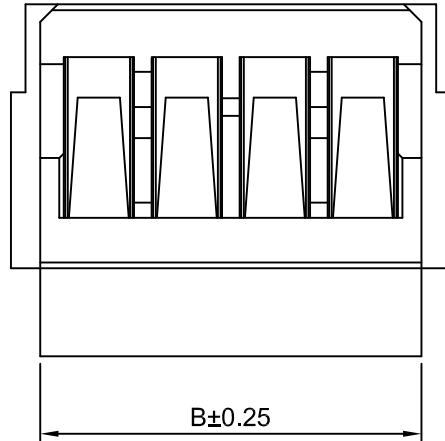


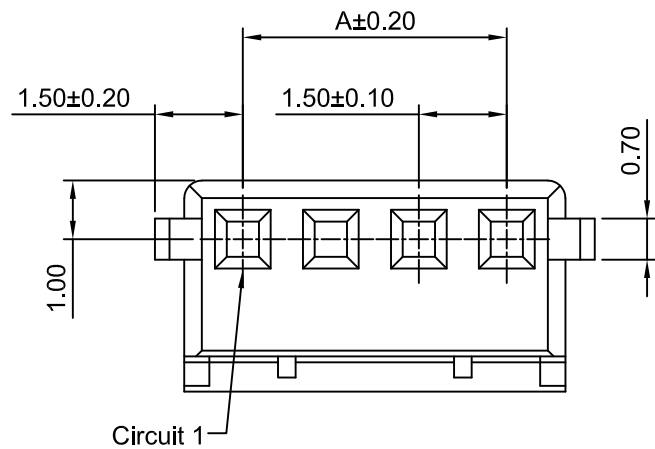

Ordering Information:

A1502HA-XP - *** - ***
1 2 3

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750℃

3.Color:

(blank) - White

BL - Blue

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	3.50	12P	16.50	18.50
3P	3.00	5.00	13P	18.00	20.00
4P	4.50	6.50	14P	19.50	21.50
5P	6.00	8.00	15P	21.00	23.00
6P	7.50	9.50	16P	22.50	24.50
7P	9.00	11.00	17P	24.00	26.00
8P	10.50	12.50	18P	25.50	27.50
9P	12.00	14.00	19P	27.00	29.00
10P	13.50	15.50	20P	28.50	30.50
11P	15.00	17.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 1.50mm PITCH HOUSING	
mm		8:1		1 of 2			
DRWN		CHK'D		APPR			
Xu Lei		Diankui Wan		Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO. A1502HA-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
						REV A2	

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2022.01.13
A1	CHANGE THE DRAWING	2019.01.11
A0	NEW RELEASE	2013.07.01