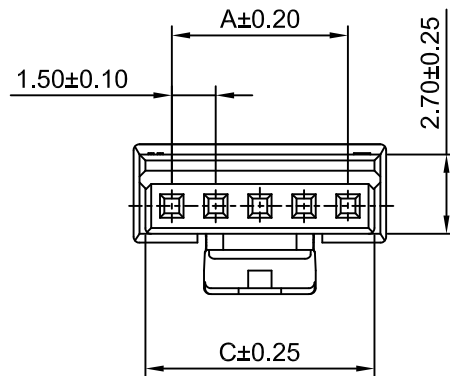

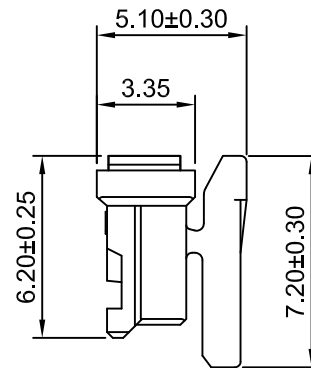
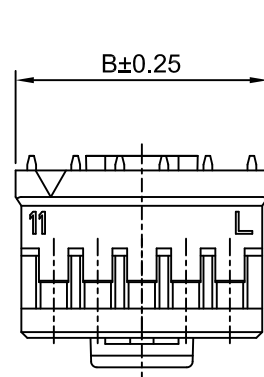

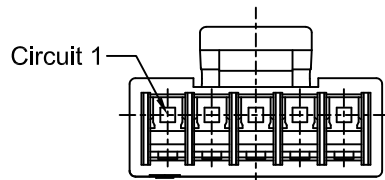


2P~3P

4P~7P

8P~15P

Ordering Information:

A1502HB-XP - ***

1 2

1.Part NO.

2.Halogen:

(Blank): Normal Material

HF: Halogen Free

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1502HB-2P	1.50	4.10	3.30
A1502HB-3P	3.00	5.60	4.80
A1502HB-4P	4.50	7.10	6.30
A1502HB-5P	6.00	8.60	7.80
A1502HB-6P	7.50	10.10	9.30
A1502HB-7P	9.00	11.60	10.80
A1502HB-8P	10.50	13.10	12.30
A1502HB-9P	12.00	14.60	13.80
A1502HB-10P	13.50	16.10	15.30
A1502HB-11P	15.00	17.60	16.80
A1502HB-12P	16.50	19.10	18.30
A1502HB-13P	18.00	20.60	19.80
A1502HB-14P	19.50	22.10	21.30
A1502HB-15P	21.00	23.60	22.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 1			
DRAWN		CHK'D		APPR			
Xu Lei		Diankui Wan		Jack Yin		1.50mm PITCH HOUSING	
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x.xx±0.25							
x.xx±0.20							
x.xx±0.15							
ANGLES ±1°				A1502HB-XP		REV A2	