
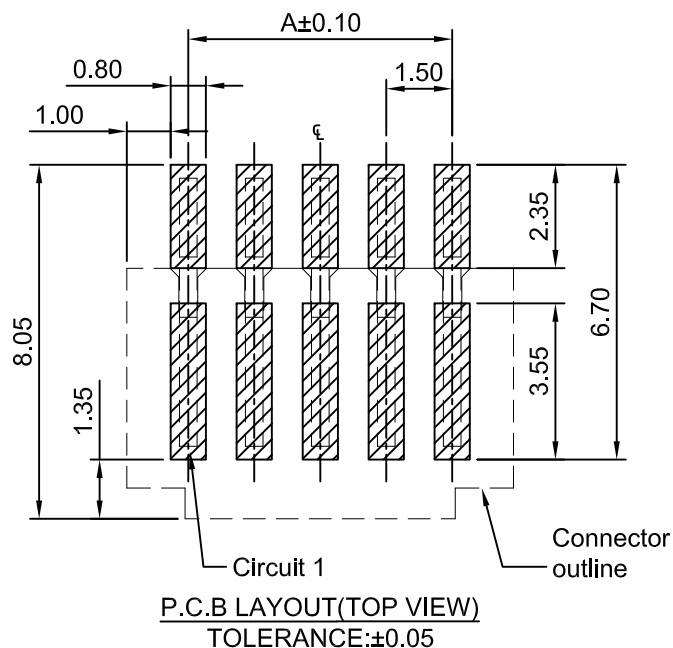
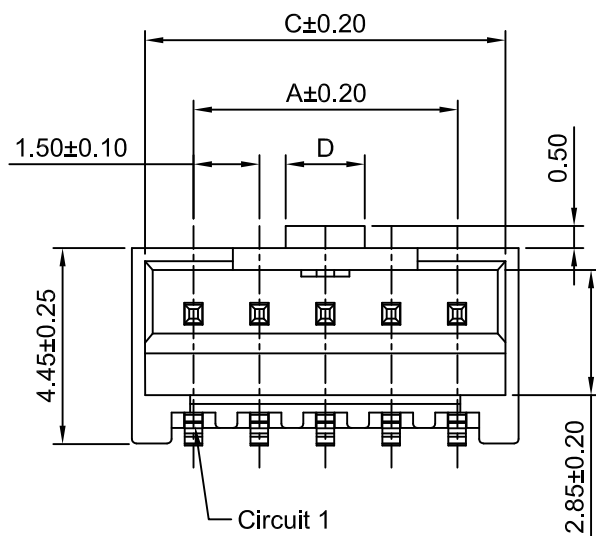
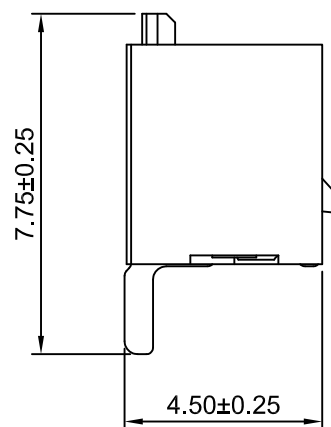


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A1502WRB-S-2P	1.50	4.30	3.70	0.90
A1502WRB-S-3P	3.00	5.80	5.20	0.90
A1502WRB-S-4P	4.50	7.30	6.70	1.80
A1502WRB-S-5P	6.00	8.80	8.20	1.80
A1502WRB-S-6P	7.50	10.30	9.70	1.80
A1502WRB-S-7P	9.00	11.80	11.20	1.80
A1502WRB-S-8P	10.50	13.30	12.70	3.60
A1502WRB-S-9P	12.00	14.80	14.20	3.60
A1502WRB-S-10P	13.50	16.30	15.70	3.60
A1502WRB-S-11P	15.00	17.80	17.20	3.60
A1502WRB-S-12P	16.50	19.30	18.70	3.60
A1502WRB-S-13P	18.00	20.80	20.20	3.60
A1502WRB-S-14P	19.50	22.30	21.70	3.60
A1502WRB-S-15P	21.00	23.80	23.20	3.60

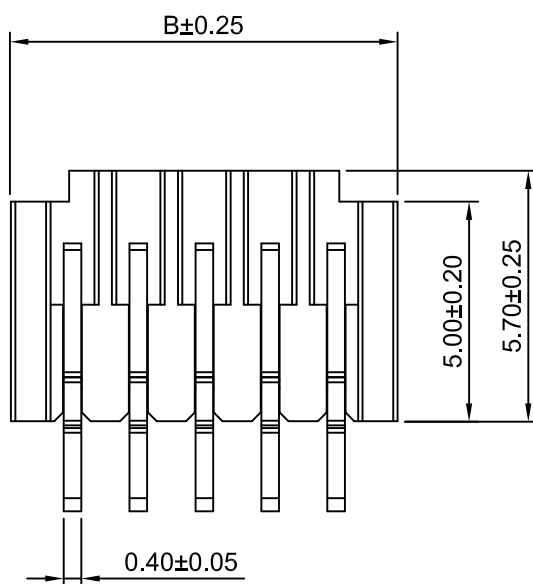

A2	CHANGE THE DRAWING	2022.01.13
A1	MODIFY DRAWING	2021.07.01
A0	NEW RELEASE	2018.06.28
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.50mm PITCH RIGHT ANGLE HEADER - SMD TYPE	
DRWN	CHK'D	APPR	DRAWING NO.	
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances:		THIRD ANGLE PROJECTION	A1502WRB-S-XP	REV A2
x,xx±0.25				
x,xxx±0.20				
x,xxxx±0.15				
ANGLES ±1°				