

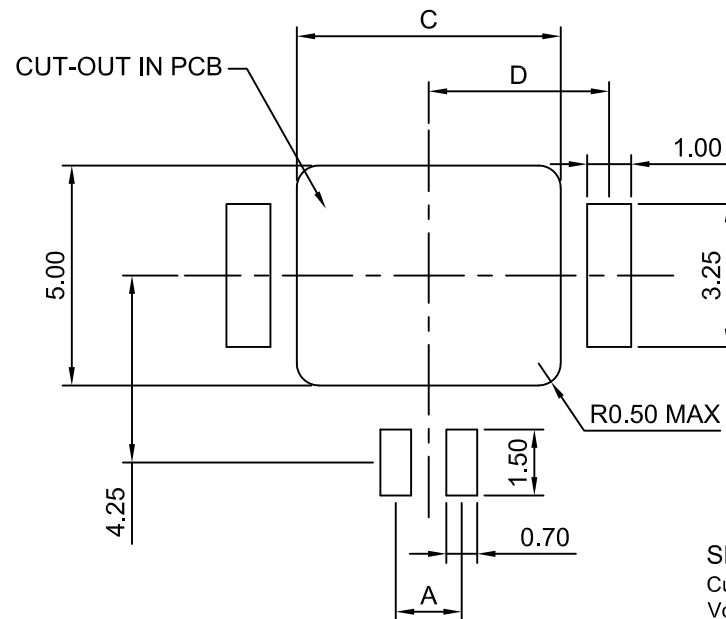
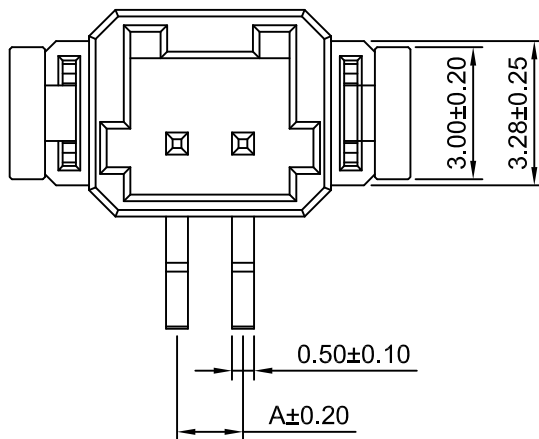


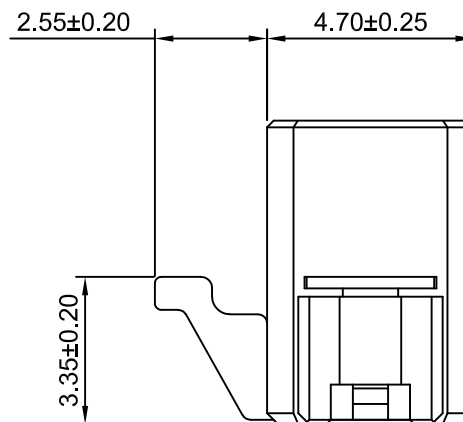

P.C.B LAYOUT

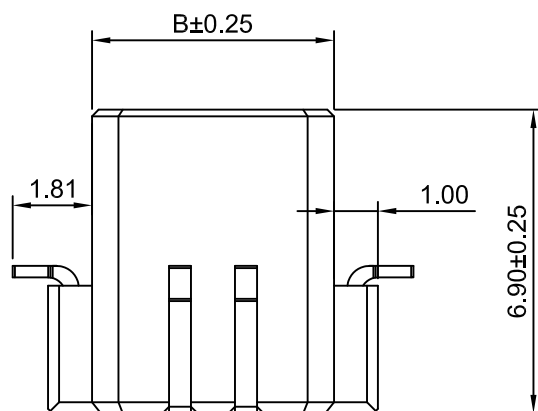

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2P	1.50	5.50	6.00	4.10	5P	6.00	10.00	10.50	6.35
3P	3.00	7.00	7.50	4.85	6P	7.50	11.50	12.00	7.10
4P	4.50	8.50	9.00	5.60					

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 1.50mm PITCH THRU BOARD INVERTED SMT VERTICAL WAFER	
mm	6:1	1 of 1		
DRWN	CHK'D	APPR		
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1502WVA-IT-S-XP	
x,x±0.25 x,x±0.20 x,xxx±0.15 ANGLES ±1°				
		REV A1		