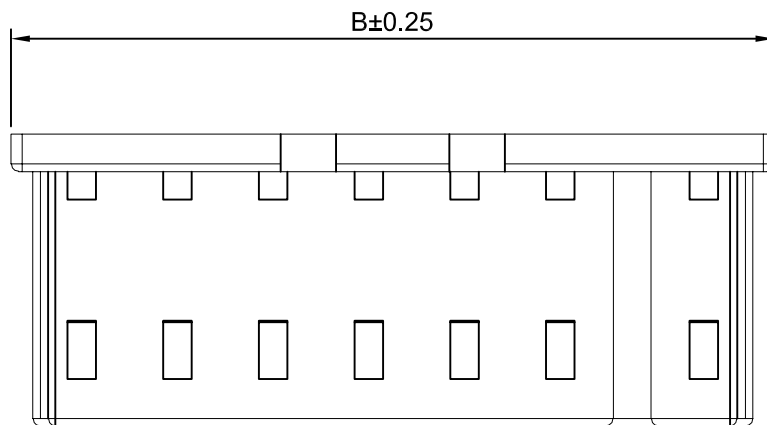
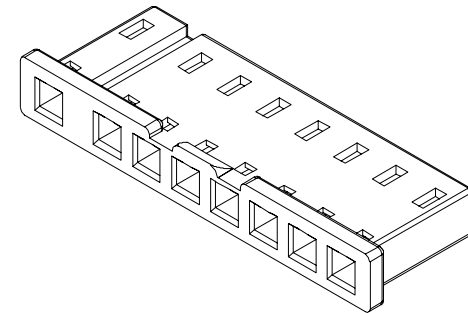

$$\frac{A1561HB-XP}{1} - \frac{**}{2}$$

V0:Nylon 66+10%GF,UL94V-0



Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66+10%GF,UL94V-2(Gray)

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	7.62	15.12	6P	27.94	35.44
3P	12.70	20.20	7P	33.02	40.52
4P	17.78	25.28	8P	38.10	45.60
5P	22.86	30.36			

CHANGJIANG CONNECTORS CO.,LTD.

Title :	7.62-5.08mm PITCH
---------	-------------------

HOUSING

	General Tolerance	
0	$x.x \leq 0.25$ $x.xx \leq 0.20$ $x.xxx \leq 0.15$	ANGLE± 

REV
A0