

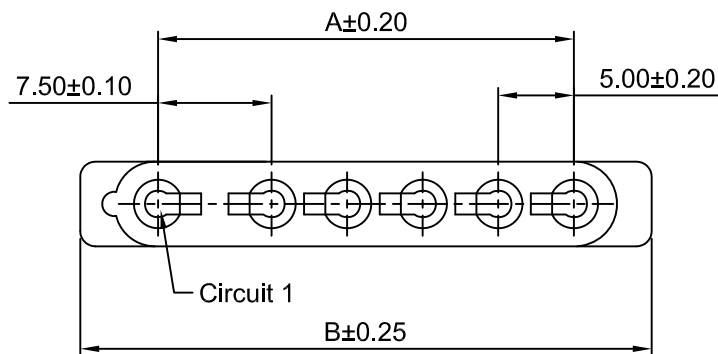
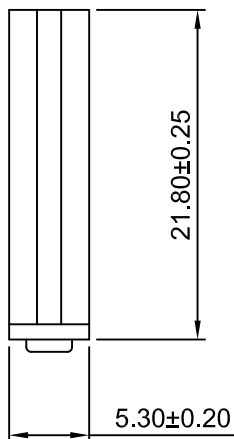


1P

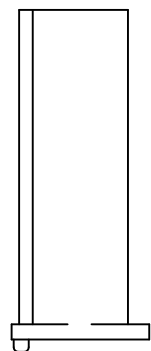

2P~6P

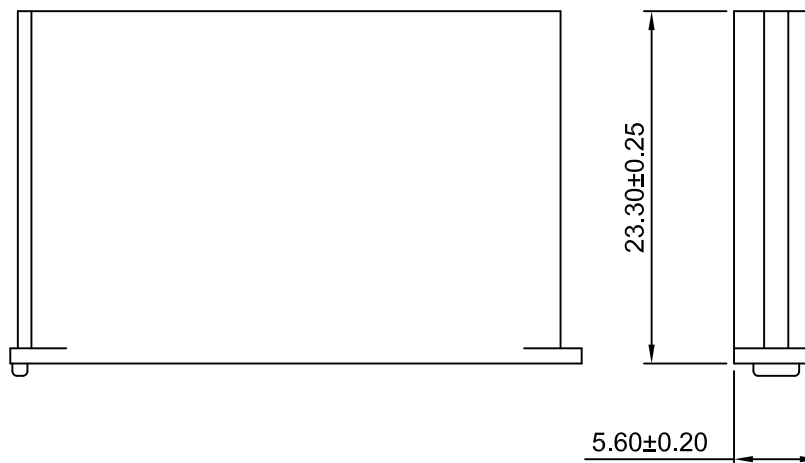

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1562H-1P	—	9.10
A1562H-2P	7.50	16.00
A1562H-3P	12.50	22.00
A1562H-4P	17.50	27.00
A1562H-5P	22.50	32.00
A1562H-6P	27.50	37.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 7.50-5.00mm PITCH HOUSING	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1562H-XP	REV A1
x,x±0.25				
x.xxx±0.15				
ANGLES ±1°				
				