
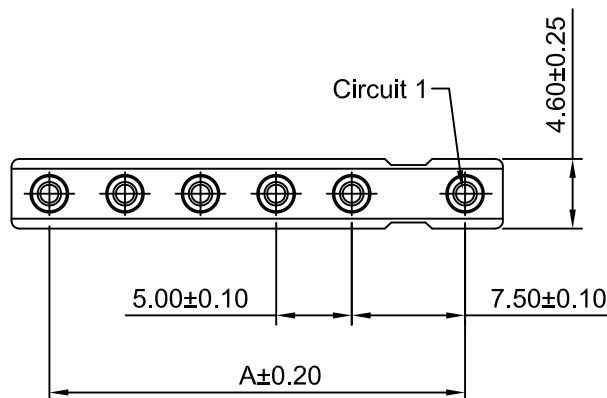


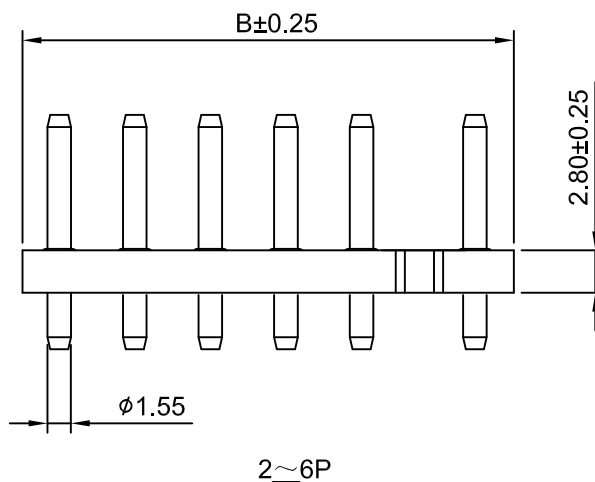
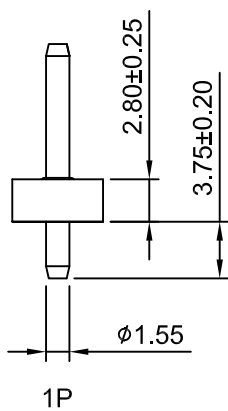


P.C.B LAYOUT
TOLERANCE:±0.05

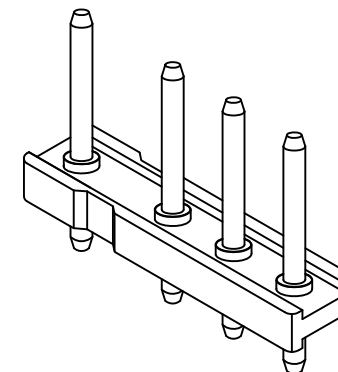

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1562WV-1P	—	6.00
A1562WV-2P	7.50	12.60
A1562WV-3P	12.50	17.60
A1562WV-4P	17.50	22.60
A1562WV-5P	22.50	27.60
A1562WV-6P	27.50	32.60

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 7.50-5.00mm PITCH 180° WAFER
mm	2:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO. A1562WV-XP
General Tolerances		THIRD ANGLE PROJECTION	
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			
A1	CHANGE THE DRAWING	2020.05.13	REV A1
A0	NEW RELEASE	2009.05.10	
REV	DESCRIPTION	DATE	