





2P~16P

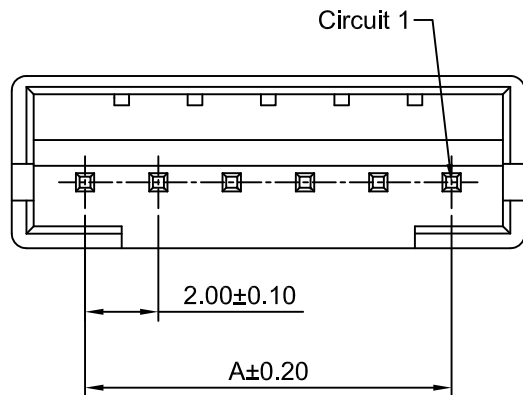

PIN 0.50 SQ

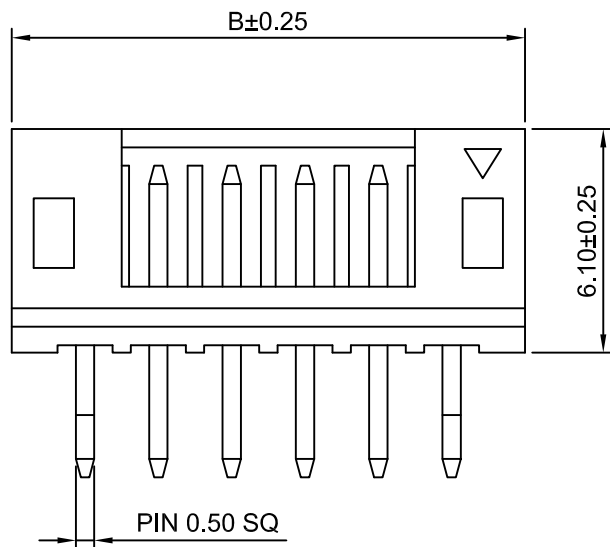

17P(5:1)

Ordering Information:

A2001WV-XP - $\frac{**}{2} - \frac{**}{3} - \frac{***}{4} - \frac{***}{5}$

1.Part No.

2.Style:

(blank): Type 1

2: Type 2

3.Material:

(blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

46: Nylon 46,UL94V-0 (Beige)

9T: Nylon 9T,UL94V-0 (Beige)

LCP: LCP,UL94V-0(Beige)

4.Color:

(blank): White

GN: Green


RD: Red

BK: Black


5.Finish:

(blank): Tin over Nickel


G: Gold over Nickel




TYPE 1



TYPE 2

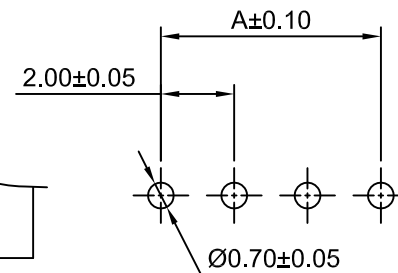

P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating:100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	10P	18.00	22.00
3P	4.00	8.00	11P	20.00	24.00
4P	6.00	10.00	12P	22.00	26.00
5P	8.00	12.00	13P	24.00	28.00
6P	10.00	14.00	14P	26.00	30.00
7P	12.00	16.00	15P	28.00	32.00
8P	14.00	18.00	16P	30.00	34.00
9P	16.00	20.00	17P	32.00	36.00

REV	DESCRIPTION	DATE
A6	CHANGE THE DRAWING	2022.10.31
A5	CHANGE THE DRAWING	2021.12.23
A4	CHANGE THE DRAWING	2021.04.25
A3	ADD THE SIZE OF PIN	2019.07.03
A2	CHANGE THE DRAWING	2019.04.18
A1	Change the structure	2015.06.29