

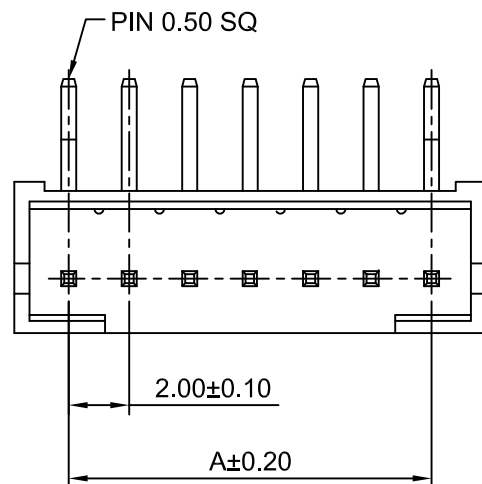


P.C.B LAYOUT

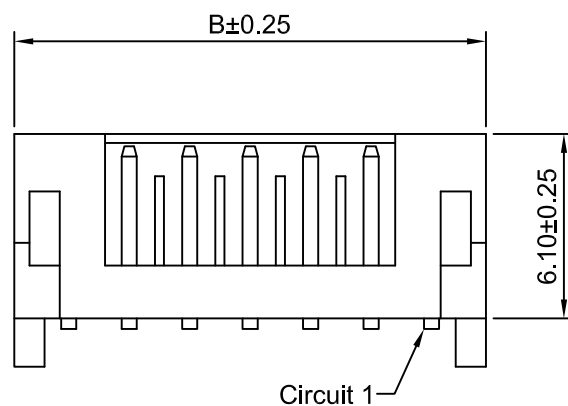

Circuit 1

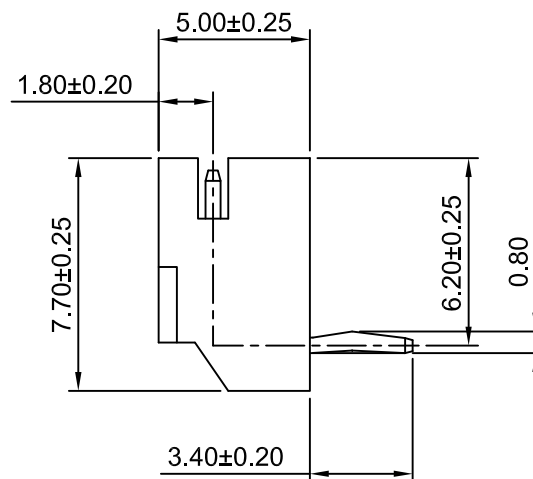

Ordering Information:

A2002WR-XP - *** - ***

1 2 3

1.Part No.

2.Material:


(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Packing:

(blank): bag

TU: Tube



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Brown)

Pantone Color: 153C~154C

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	9P	16.00	20.00
3P	4.00	8.00	10P	18.00	22.00
4P	6.00	10.00	11P	20.00	24.00
5P	8.00	12.00	12P	22.00	26.00
6P	10.00	14.00	13P	24.00	28.00
7P	12.00	16.00	14P	26.00	30.00
8P	14.00	18.00	15P	28.00	32.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

A1	ADD THE INFOMATION	2020.06.01	x.x±0.25	PROJECT
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :		2.00mm PITCH	
		90° WAFER	
DRAW NO :		A2002WR-XP	REV A1