
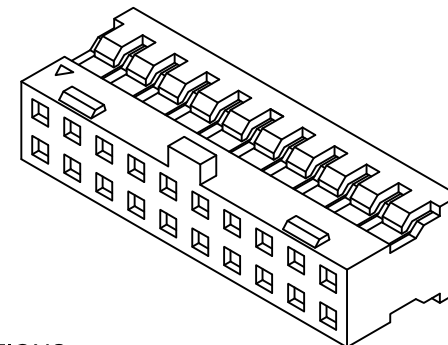
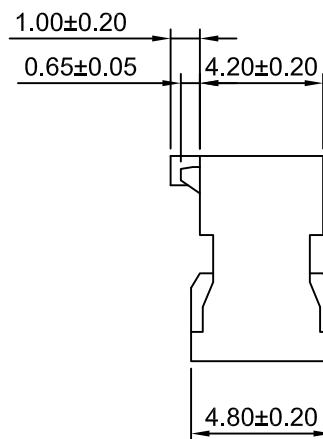
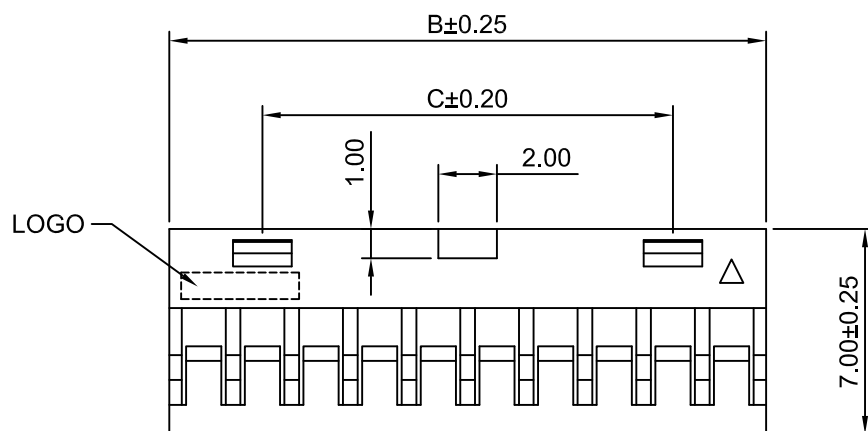


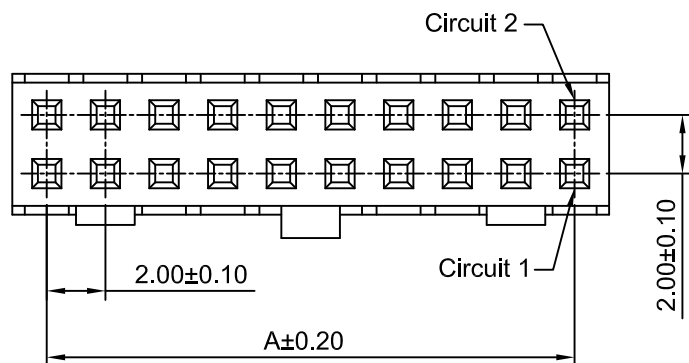

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x7P	12.00	14.35	8.00	2x17P	32.00	34.35	28.00
2x8P	14.00	16.35	10.00	2x18P	34.00	36.35	30.00
2x9P	16.00	18.35	12.00	2x19P	36.00	38.35	32.00
2x10P	18.00	20.35	14.00	2x20P	38.00	40.35	34.00
2x11P	20.00	22.35	16.00	2x21P	40.00	42.35	36.00
2x12P	22.00	24.35	18.00	2x22P	42.00	44.35	38.00
2x13P	24.00	26.35	20.00	2x23P	44.00	46.35	40.00
2x14P	26.00	28.35	22.00	2x24P	46.00	48.35	42.00
2x15P	28.00	30.35	24.00	2x25P	48.00	50.35	44.00
2x16P	30.00	32.35	26.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRWN	CHKD	APPR
Dengchun Yi	Diankui Wan	Jack Yin

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25	
x.xxx±0.20	
x.xxxx±0.15	
ANGLES ±1°	

TITLE	
2.00mm Pitch Dual Row Housing	
DRAWING NO.	REV
A2005HB-N-2xXP-D	A3

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2021.09.06
A2	CHANGE THE DRAWING	2019.02.16
A1	MODIFY THE MOLD	2017.04.02
A0	NEW RELEASE	2021.08.26