

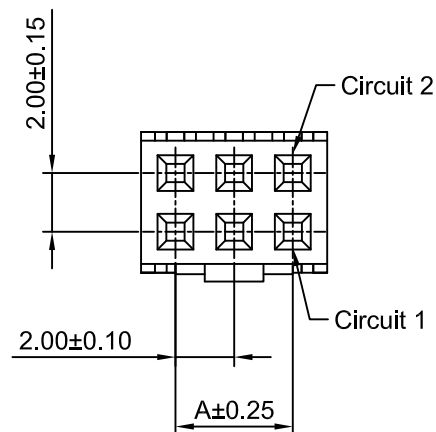


2x2P

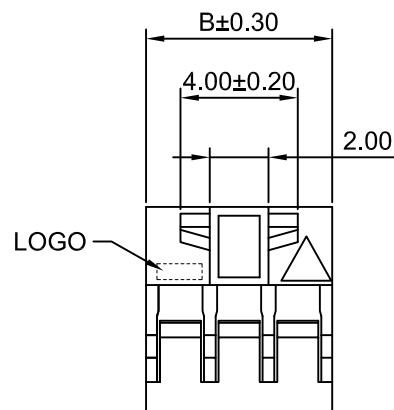

2x3P~2x25P

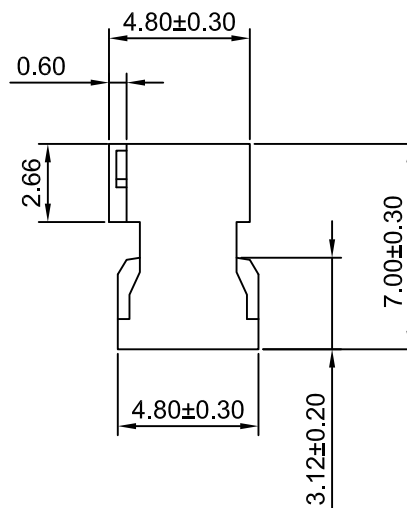

Ordering Information:

A2005HB-N-2xXP-FI - ***

1 2


1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(Black)

GWT: Nylon 66,UL94V-0(Black),IEC

60335-1,5th Edition Glow Wire Capable.



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	4.35	2x12P	22.00	24.35
2x3P	4.00	6.35	2x13P	24.00	26.35
2x4P	6.00	8.35	2x14P	26.00	28.35
2x5P	8.00	10.35	2x15P	28.00	30.35
2x6P	10.00	12.35	2x16P	30.00	32.35
2x7P	12.00	14.35	2x17P	32.00	34.35
2x8P	14.00	16.35	2x18P	34.00	36.35
2x9P	16.00	18.35	2x19P	36.00	38.35
2x10P	18.00	20.35	2x20P	38.00	40.35
2x11P	20.00	22.35	2x22P	42.00	44.35

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 1			
DRWN		CHK'D		APPR		2.00mm PITCH DUAL HOUSING	
Dengchun Yi		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2005HB-N-2xXP-FI	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
REV						A3	

A3	MODIFY DRAWING	2022.08.24
A2	CHANGE THE DRAWING	2019.11.01
A1	ADD THE INFORMATION	2018.12.25
A0	NEW RELEASE	2013.02.21
REV	DESCRIPTION	DATE