


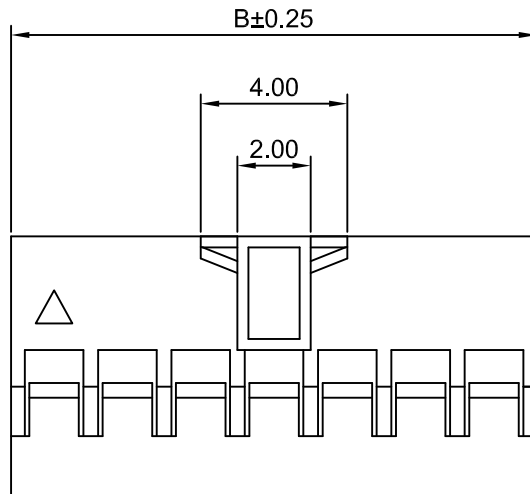


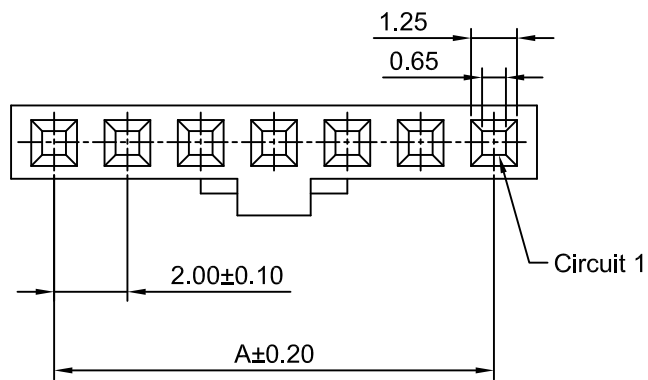

3P~17P

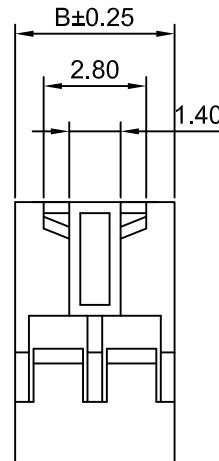

2P

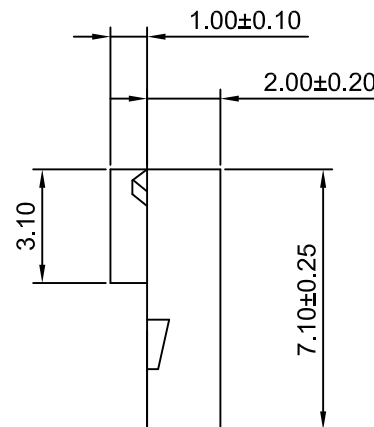

Ordering Information:

A2005HB-N-XP-FI - **
1 2

1.Part No.

2.Color:

(Blank):White

BK:Black

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	4.35	10P	18.00	20.35
3P	4.00	6.35	11P	20.00	22.35
4P	6.00	8.35	12P	22.00	24.35
5P	8.00	10.35	13P	24.00	26.35
6P	10.00	12.35	14P	26.00	28.35
7P	12.00	14.35	15P	28.00	30.35
8P	14.00	16.35	16P	30.00	32.35
9P	16.00	18.35	17P	32.00	34.35

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw By:		Approved :
Chengbiao Ye		Jack Yln

Title :

2.00mm Pitch

Single Row Housing

DRAW NO : A2005HB-N-XP-FI

REV
A2

A2	CHANGE THE DRAWING	2023.06.28	General Tolerance	
A1	CHANGE THE DRAWING	2019.09.19	x.xx±0.25	PROJECT
A0	NEW RELEASE	2013.02.21	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	