
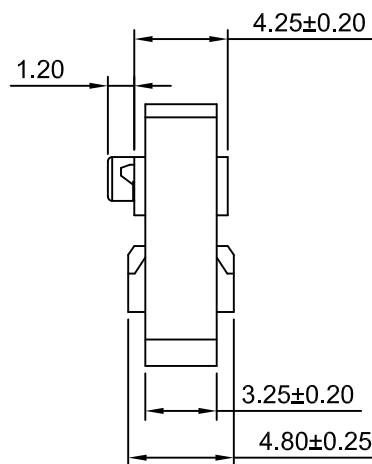
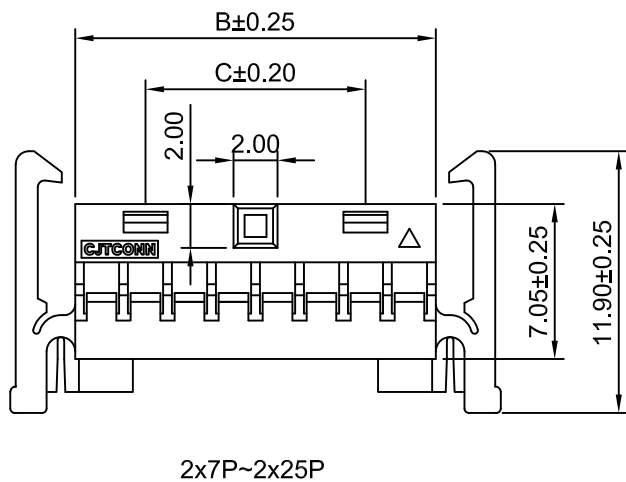


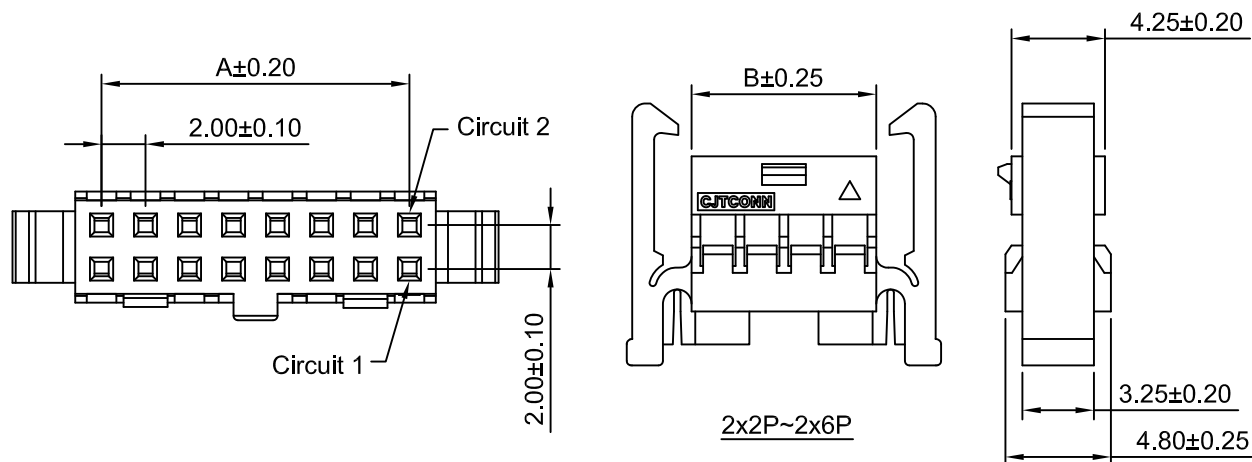

### SPECIFICATIONS:

Current Rating: 2A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Material:Nylon 66,UL94V-0(Black)

### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 2x2P     | 2.00           | 4.35  | ----  | 2x14P    | 26.00          | 28.35 | 22.00 |
| 2x3P     | 4.00           | 6.35  | ----  | 2x15P    | 28.00          | 30.35 | 24.00 |
| 2x4P     | 6.00           | 8.35  | ----  | 2x16P    | 30.00          | 32.35 | 26.00 |
| 2x5P     | 8.00           | 10.35 | ----  | 2x17P    | 32.00          | 34.35 | 28.00 |
| 2x6P     | 10.00          | 12.35 | ----  | 2x18P    | 34.00          | 36.35 | 30.00 |
| 2x7P     | 12.00          | 14.35 | 8.00  | 2x19P    | 36.00          | 38.35 | 32.00 |
| 2x8P     | 14.00          | 16.35 | 10.00 | 2x20P    | 38.00          | 40.35 | 34.00 |
| 2x9P     | 16.00          | 18.35 | 12.00 | 2x21P    | 40.00          | 42.35 | 36.00 |
| 2x10P    | 18.00          | 20.35 | 14.00 | 2x22P    | 42.00          | 44.35 | 38.00 |
| 2x11P    | 20.00          | 22.35 | 16.00 | 2x23P    | 44.00          | 46.35 | 40.00 |
| 2x12P    | 22.00          | 24.35 | 18.00 | 2x24P    | 46.00          | 48.35 | 42.00 |
| 2x13P    | 24.00          | 26.35 | 20.00 | 2x25P    | 48.00          | 50.35 | 44.00 |

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

| Unit                                                 | Scale       | Sheet    | TITLE                            |  |
|------------------------------------------------------|-------------|----------|----------------------------------|--|
| mm                                                   | 3:1         | 1 of 1   |                                  |  |
| DRAWN                                                | CHKD        | APPR     | 2.00mm PITCH<br>DUAL ROW HOUSING |  |
| Chengbiao Ye                                         | Diankui Wan | Jack Yin |                                  |  |
| General Tolerances                                   |             |          | THIRD ANGLE PROJECTION           |  |
| x.xx±0.25<br>x.xxx±0.20<br>x.xxxx±0.15<br>ANGLES ±1° |             |          | DRAWING NO. A2005HC-2xXP         |  |
| REV                                                  |             |          | REV A3                           |  |

|     |                    |            |
|-----|--------------------|------------|
| A3  | CHANGE THE DRAWING | 2023.01.14 |
| A2  | CHANGE THE DRAWING | 2018.05.05 |
| A1  | CHANGE THE DRAWING | 2018.01.02 |
| A0  | NEW RELEASE        | 2017.10.31 |
| REV | DESCRIPTION        | DATE       |