

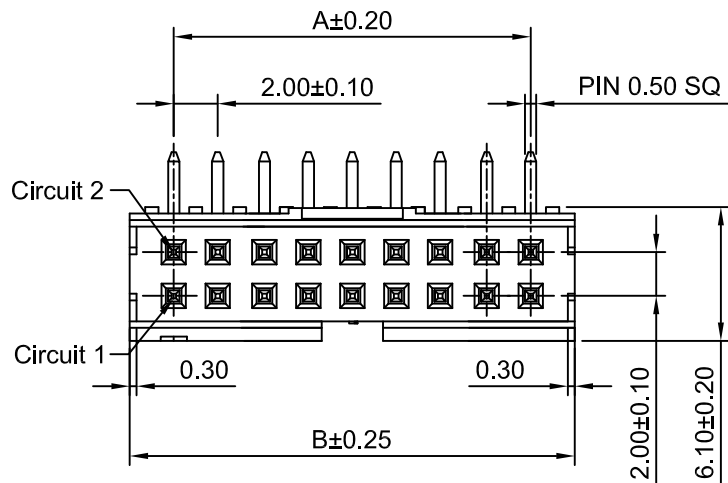
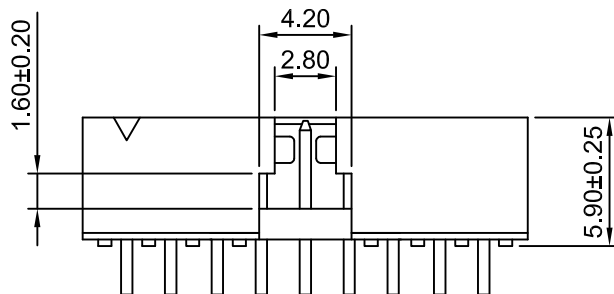


P.C.B LAYOUT
TOLERANCE:±0.05



2x3P~2x20P

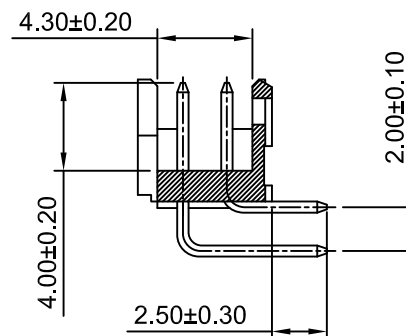

2x2P

Ordering Information:

A2005WR-N-2xXP-FI - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 9T,UL94V-0

GWT: Nylon 9T,UL94V-0,IEC 60335-1,5th
Edition Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass

Material: Nylon 9T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
2x2P	2.00	6.00	2x11P	20.00	24.00
2x3P	4.00	8.00	2x12P	22.00	26.00
2x4P	6.00	10.00	2x13P	24.00	28.00
2x5P	8.00	12.00	2x14P	26.00	30.00
2x6P	10.00	14.00	2x15P	28.00	32.00
2x7P	12.00	16.00	2x16P	30.00	34.00
2x8P	14.00	18.00	2x17P	32.00	36.00
2x9P	16.00	20.00	2x18P	34.00	38.00
2x10P	18.00	22.00	2x20P	38.00	42.00

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
DRWN	CHK'D	APPR
Haisen Li	Diankui Wan	Jack Yin

General Tolerances

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION



TITLE
**2.00mm PITCH
RIGHT ANGLE DUAL ROW
BOX HEADER**

DRAWING NO.	REV
A2005WR-N-2xXP-FI	A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2012.12.26