
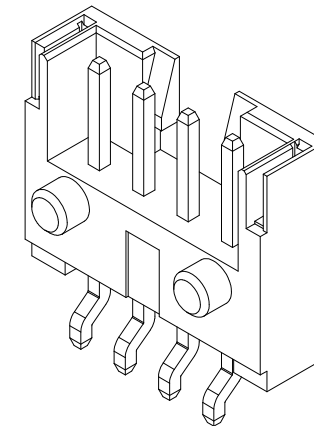
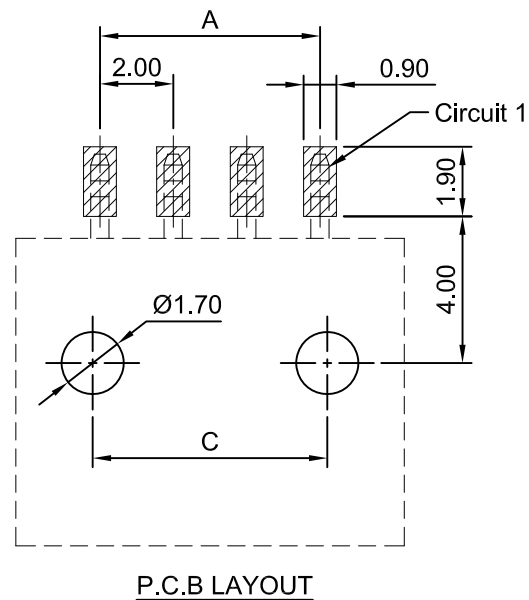



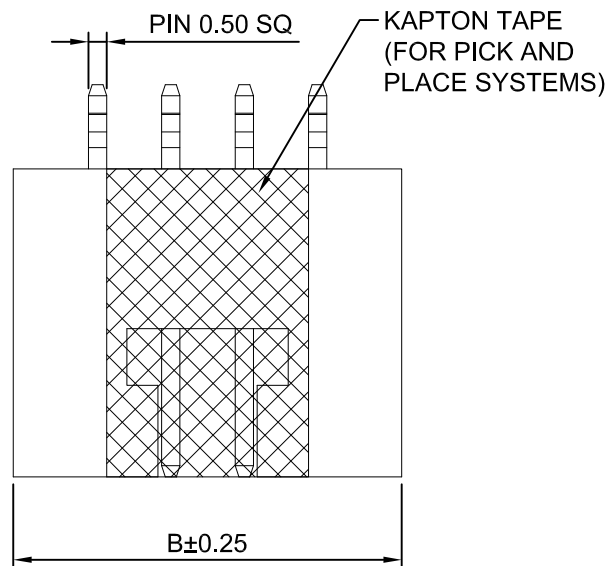


SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2005WR-N-S-F-3P-FI	4.00	8.60	4.40
A2005WR-N-S-F-4P-FI	6.00	10.60	6.40
A2005WR-N-S-F-6P-FI	10.00	14.60	10.40
A2005WR-N-S-F-8P-FI	14.00	18.60	14.40
A2005WR-N-S-F-10P-FI	18.00	22.60	18.40

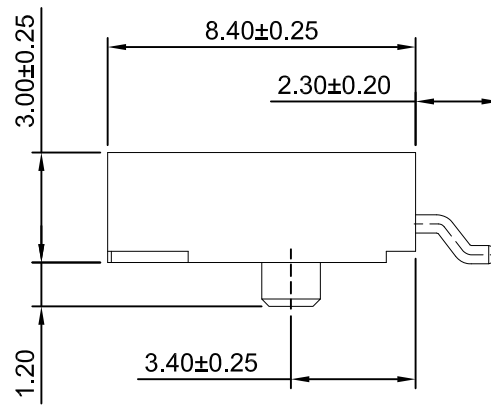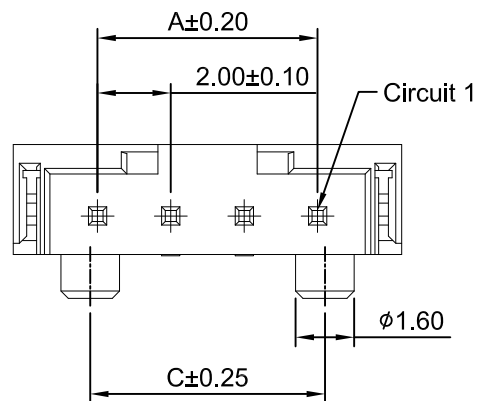

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	5:1	1 of 1	2.00mm PITCH 90° WAFER - SMD TYPE		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25			A2005WR-N-S-F-XP-FI		A1
x.xx±0.20					
x.xx±0.15					
ANGLES ±1°					