
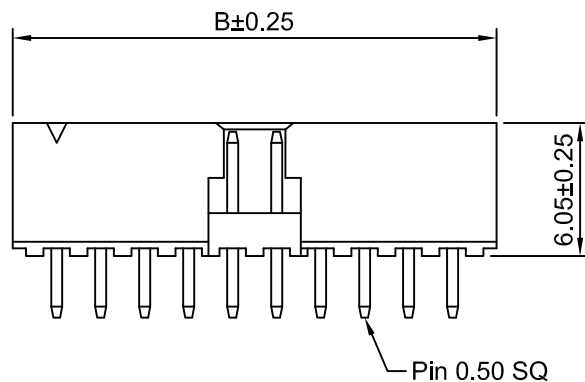
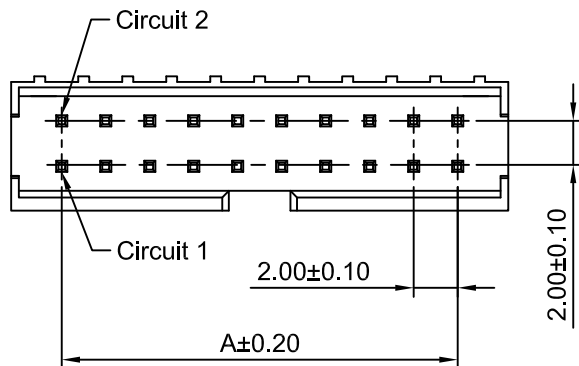


P.C.B LAYOUT

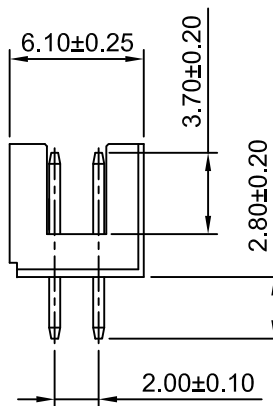

Ordering Information:

A2005WV-N-2xXP-FI - *** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 9T,UL94V-0

6T: Nylon 6T,UL94V-0

GWT: Nylon 6T,UL94V-0,GWT 750℃

3.Color:

(Blank): Black

IV: Ivory

4.Finish:

(Blank): Gold over Nickel

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Gold over Nickel

Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	8.00	12.00	2x15P	28.00	32.00
2x6P	10.00	14.00	2x17P	32.00	36.00
2x7P	12.00	16.00	2x20P	38.00	42.00
2x8P	14.00	18.00	2x22P	42.00	46.00
2x10P	18.00	22.00	2x25P	48.00	52.00
2x13P	24.00	28.00	2x30P	58.00	62.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
DRAWN	CHKD	APPR
Chengbiao Ye	Djankui Wan	Jack Yin

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25	
x.xxx±0.20	
x.xxxx±0.15	
ANGLES ±1°	

TITLE	
2.00mm Pitch Vertical Dual Row Box Header	
DRAWING NO.	REV
A2005WV-N-2xXP-FI	A2

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.05.08
A1	CHANGE THE DRAWING	2020.09.19
A0	NEW RELEASE	2020.09.19