

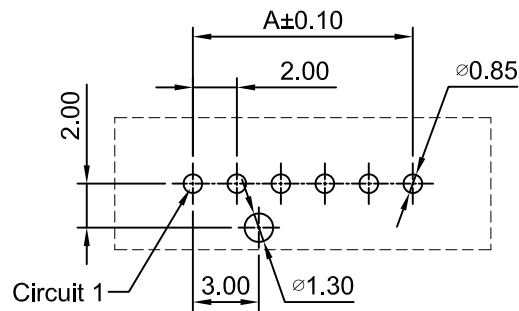
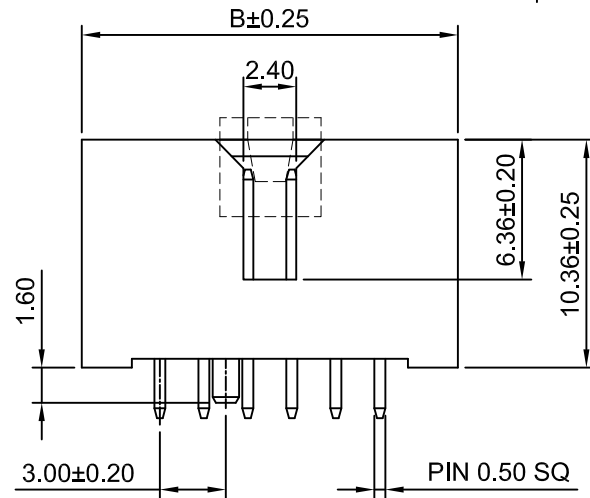
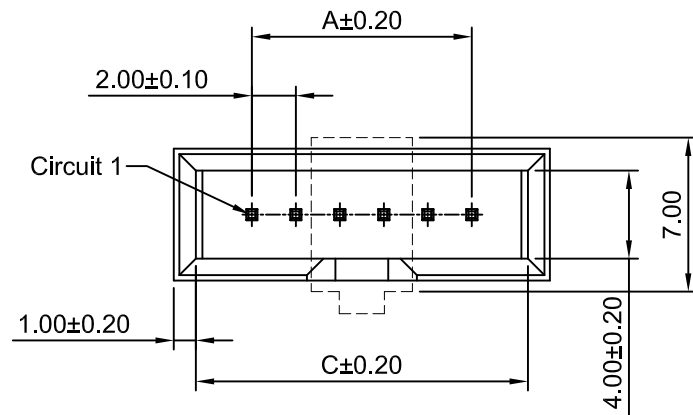
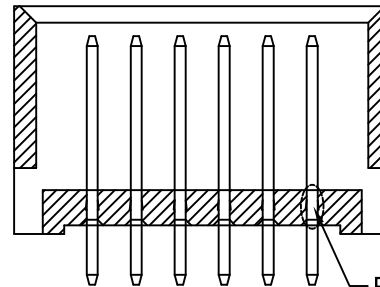


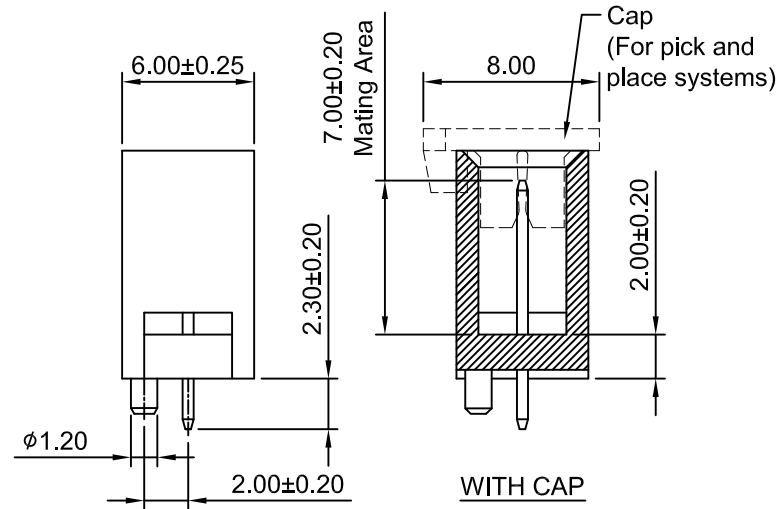

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

A2005WVCA-N-F-XP - *** - *** - ***
1 2 3 4

- Part NO.
- Color:
(blank): Black
NAT: Natural
- Finish:
(blank): Gold over Nickel
G15: Gold over Nickel(Au:15u",Mating Area)
- Packing:
(blank): Tray
CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 3A AC,DC (MAX)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass
Material: LCP,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2005WVCA-N-F-4P	6.00	13.10	11.10
A2005WVCA-N-F-5P	8.00	15.10	13.10
A2005WVCA-N-F-6P	10.00	17.10	15.10
A2005WVCA-N-F-7P	12.00	19.10	17.10
A2005WVCA-N-F-8P	14.00	21.10	19.10
A2005WVCA-N-F-9P	16.00	23.10	21.10
A2005WVCA-N-F-10P	18.00	25.10	23.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH 180° SINGLE ROW BOX HEADER	
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A2005WVCA-N-F-XP	