

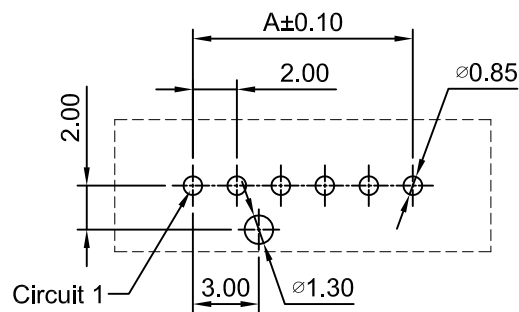
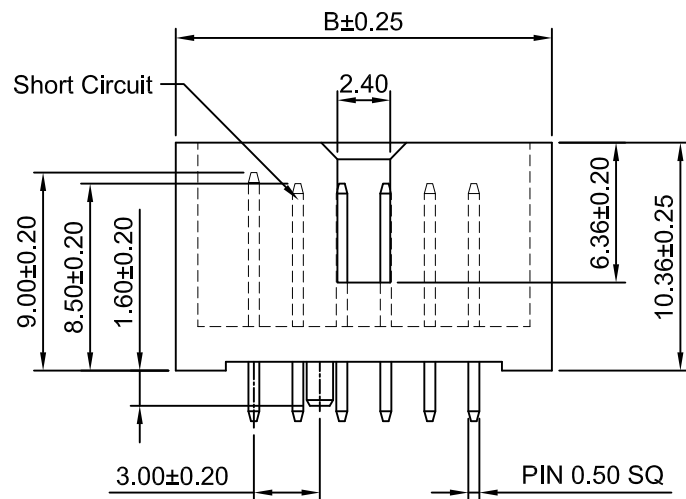
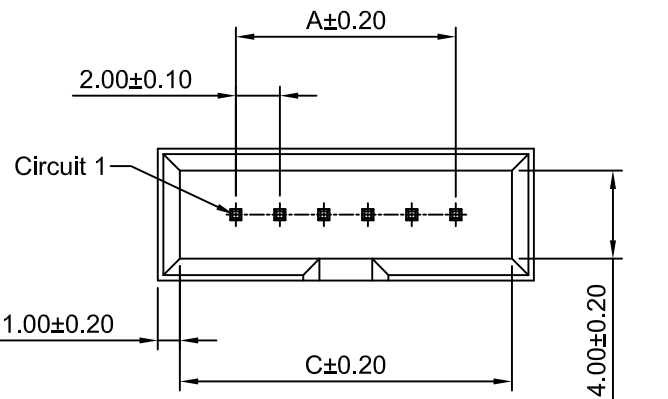



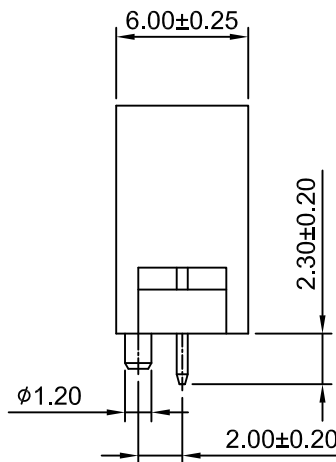

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

A2005WVCB-N-F-XP - ^{***}/₂ - ^{S*}/₃

1.Part NO.

2.Pin Finish:

(blank): Gold over Nickel

G15: Gold over Nickel(Au:15u",Mating Area)

3.Short Circuit:

S2~N: Circuit 1,L=9.00mm,other Circuits,L=8.50mm.

N=number of postions.

SPECIFICATIONS:

Current Rating: 3A AC,DC (MAX)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Material: Nylon 4T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2005WVCB-N-F-4P	6.00	13.10	11.10
A2005WVCB-N-F-5P	8.00	15.10	13.10
A2005WVCB-N-F-6P	10.00	17.10	15.10
A2005WVCB-N-F-7P	12.00	19.10	17.10
A2005WVCB-N-F-8P	14.00	21.10	19.10
A2005WVCB-N-F-9P	16.00	23.10	21.10
A2005WVCB-N-F-10P	18.00	25.10	23.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH 180° SINGLE ROW BOX HEADER	
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2005WVCB-N-F-XP-S	A0

A0	NEW RELEASE	2020.03.25
REV	DESCRIPTION	DATE