
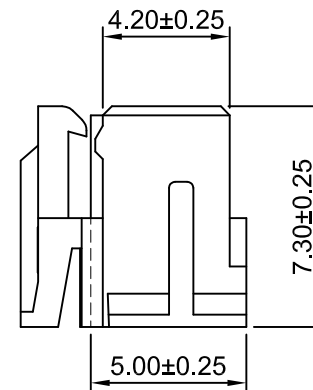
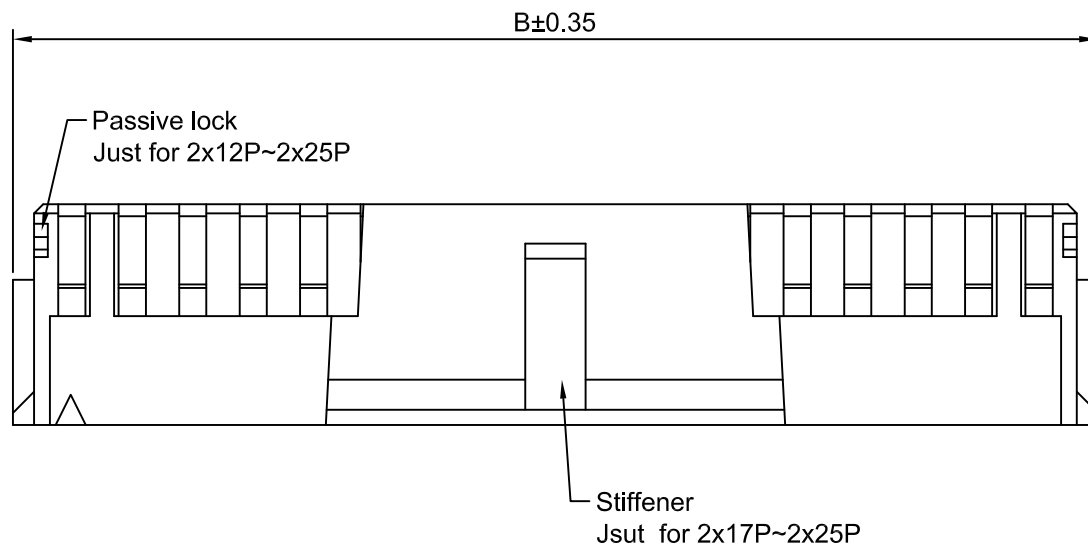


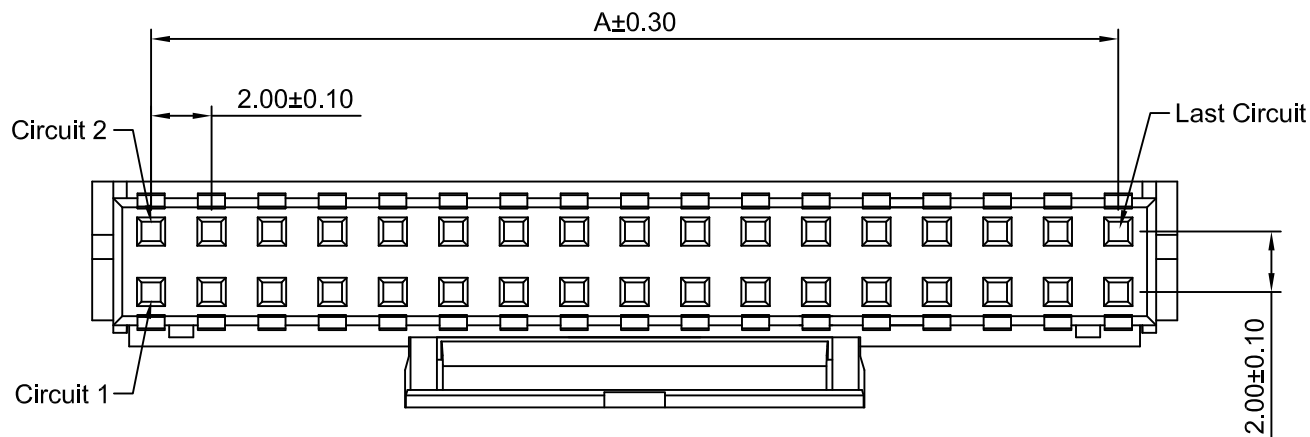

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)


Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2006HB-2x2P	2.00	5.90
A2006HB-2x3P	4.00	7.90
A2006HB-2x4P	6.00	9.90
A2006HB-2x5P	8.00	11.90
A2006HB-2x6P	10.00	13.90
A2006HB-2x7P	12.00	15.90
A2006HB-2x8P	14.00	17.90
A2006HB-2x9P	16.00	19.90
A2006HB-2x10P	18.00	21.90
A2006HB-2x11P	20.00	23.90
A2006HB-2x12P	22.00	25.90
A2006HB-2x13P	24.00	27.90
A2006HB-2x14P	26.00	29.90
A2006HB-2x15P	28.00	31.90
A2006HB-2x16P	30.00	33.90
A2006HB-2x17P	32.00	35.90
A2006HB-2x18P	34.00	37.90
A2006HB-2x19P	36.00	39.90
A2006HB-2x20P	38.00	41.90
A2006HB-2x21P	40.00	43.90
A2006HB-2x22P	42.00	45.90
A2006HB-2x23P	44.00	47.90
A2006HB-2x24P	46.00	49.90
A2006HB-2x25P	48.00	51.90



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.



Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 2	2.00mm PITCH DUAL ROW HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				A2006HB-2xXP
A1	MODIFY DRAWING	2022.09.27		REV A1
A0	NEW RELEASE	2012.05.10		
REV	DESCRIPTION	DATE		

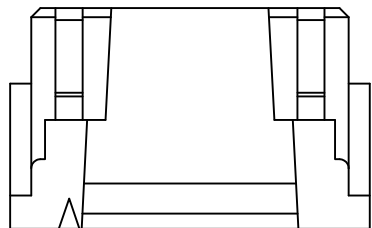



2x2P~2x6P

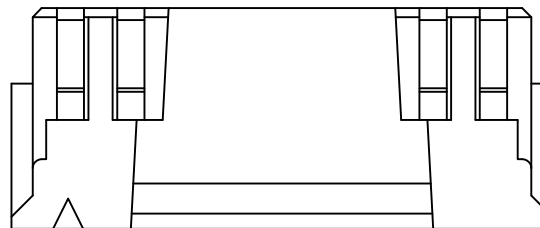


2x7P~2x11P

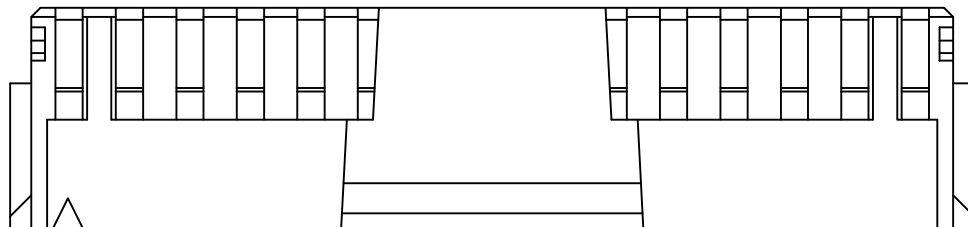

2x12P~2x16P

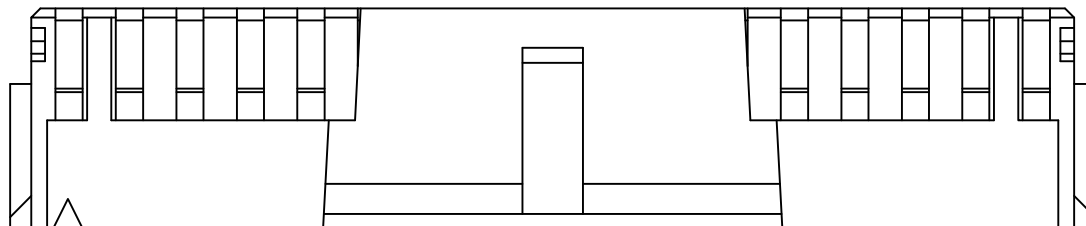

2x17P~2x25P



CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.00mm PITCH DUAL ROW HOUSING
mm	4:1	2 of 2	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO. A2006HB-2xXP
General Tolerances		THIRD ANGLE PROJECTION	
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			
A1	MODIFY DRAWING	2022.09.27	REV A1
A0	NEW RELEASE	2012.05.10	
REV	DESCRIPTION	DATE	