
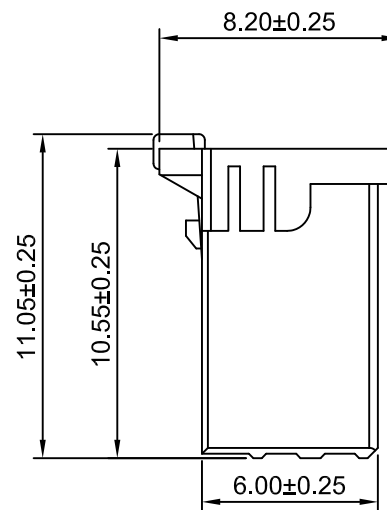
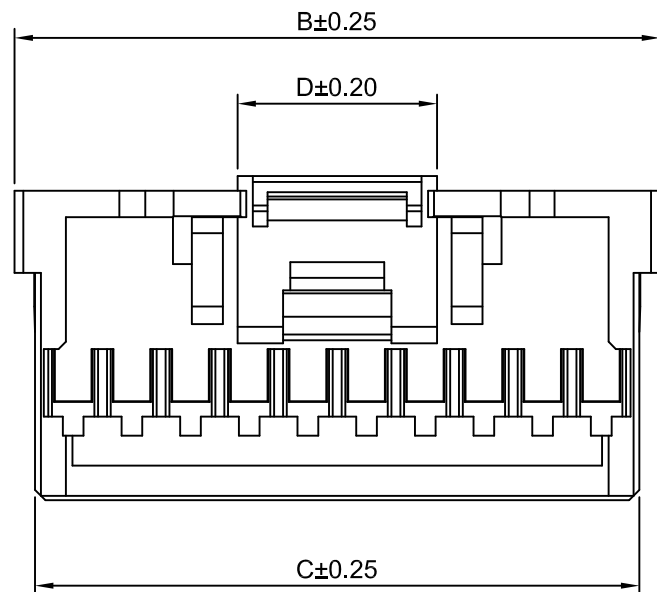


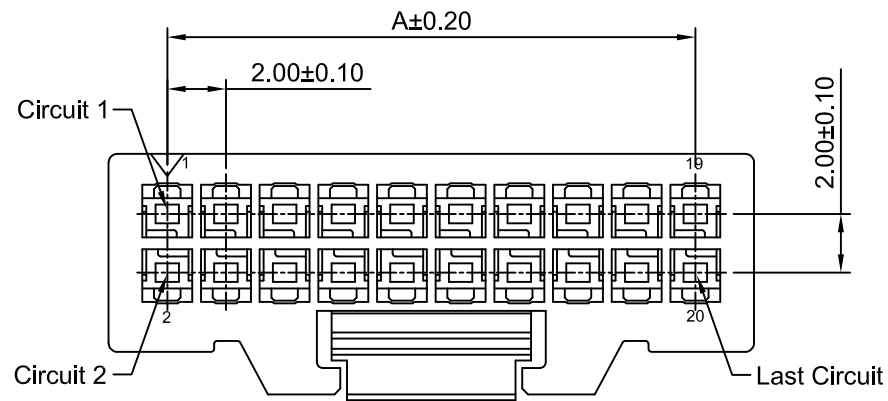

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max.
Insulation Resistance: $1000\text{M}\Omega$ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2x5P	8.00	12.20	10.60	4.70	2x13P	24.00	28.20	26.60	6.80
2x6P	10.00	14.20	12.60	6.80	2x14P	26.00	30.20	28.60	6.80
2x7P	12.00	16.20	14.60	6.80	2x15P	28.00	32.20	30.60	6.80
2x8P	14.00	18.20	16.60	6.80	2x16P	30.00	34.20	32.60	6.80
2x9P	16.00	20.20	18.60	6.80	2x17P	32.00	36.20	34.60	6.80
2x10P	18.00	22.20	20.60	6.80	2x18P	34.00	38.20	36.60	6.80
2x11P	20.00	24.20	22.60	6.80	2x19P	36.00	40.20	38.60	6.80
2x12P	22.00	26.20	24.60	6.80	2x20P	38.00	42.20	40.60	6.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 1			
DRWN		CHK'D		APPR		2.00mm Pitch	
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		Dual Row Housing	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
DRAWING NO.						REV A4	
A2006HD-2xXP							

A4	CHANGE THE DRAWING	2023.06.15
A3	CHANGE THE DRAWING	2023.02.23
A2	CHANGE THE DRAWING	2023.02.16
A1	CHANGE THE DRAWING	2021.06.04
A0	NEW RELEASE	2019.09.27
REV	DESCRIPTION	DATE