

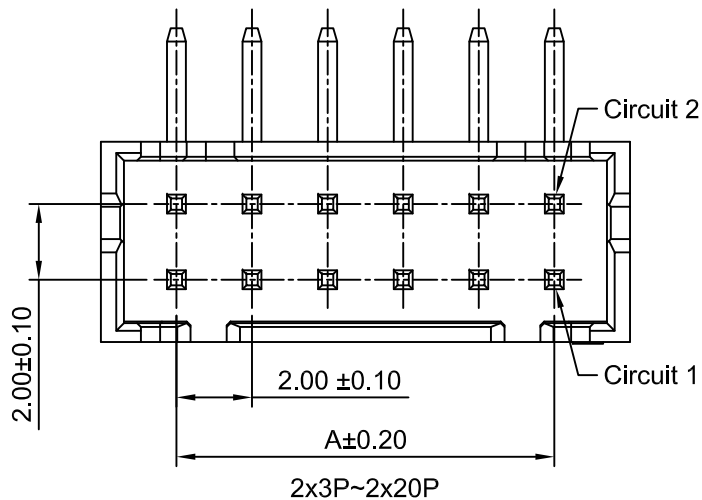



2x2P

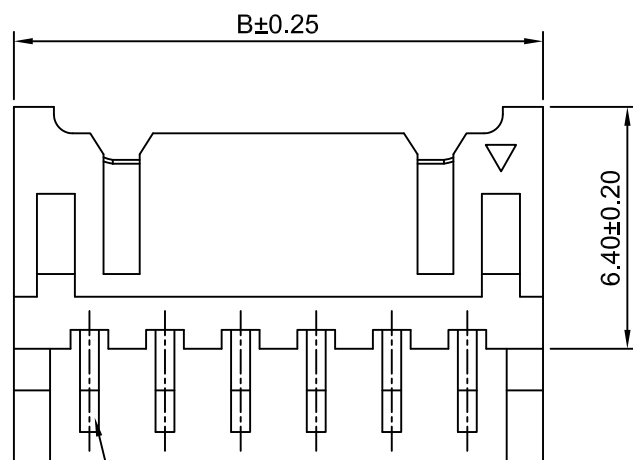

PIN0.50 SQ

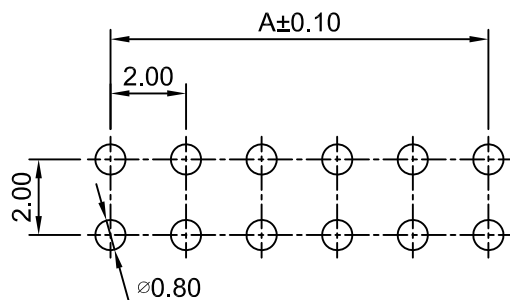

P.C.B LAYOUT
TOLERANCE:±0.05

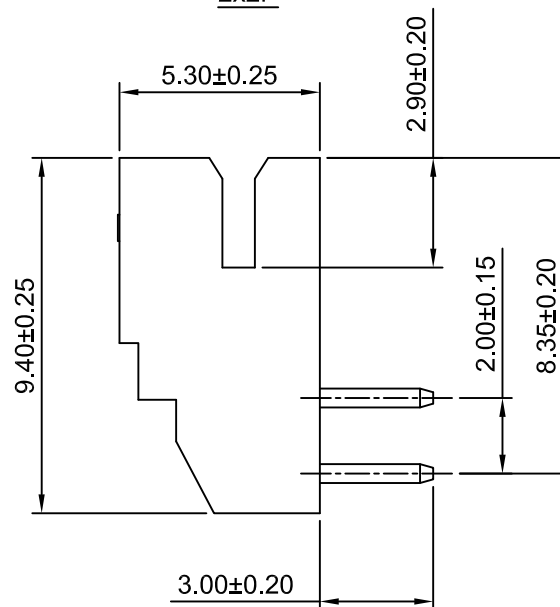

Ordering Information:

A2006WR-2xXP - 9T - ***
1 2 3

1.Part No.

2.Material:

9T: Nylon 9T,UL94V-0(Ivory)

6T: Nylon 6T,UL94V-0(Ivory)

3.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 9T,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	6.00	2x12P	22.00	26.00
2x3P	4.00	8.00	2x13P	24.00	28.00
2x4P	6.00	10.00	2x14P	26.00	30.00
2x5P	8.00	12.00	2x15P	28.00	32.00
2x6P	10.00	14.00	2x16P	30.00	34.00
2x7P	12.00	16.00	2x17P	32.00	36.00
2x8P	14.00	18.00	2x18P	34.00	38.00
2x9P	16.00	20.00	2x19P	36.00	40.00
2x10P	18.00	22.00	2x20P	38.00	42.00
2x11P	20.00	24.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

Title :

2.00mm Pitch

90° Dual Row DIP Wafer

A2	ADD THE INFORTMATION	2020.04.30
A1	CHANGE THE SIZE	2017.06.03
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

General Tolerance	PROJECT
x.x±0.25	
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A2006WR-2xXP-9T

REV
A2