
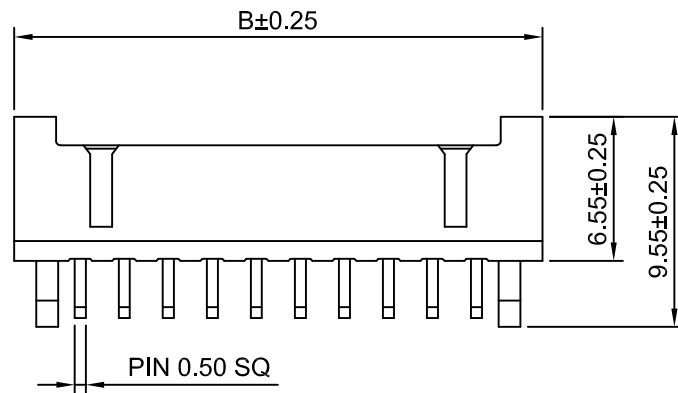
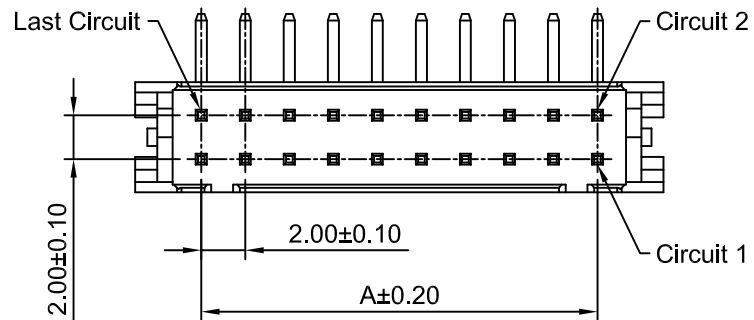



P.C.B LAYOUT

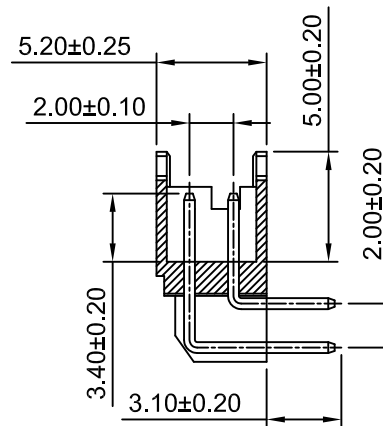

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	8.00	2x12P	22.00	28.00
2x3P	4.00	10.00	2x13P	24.00	30.00
2x4P	6.00	12.00	2x14P	26.00	32.00
2x5P	8.00	14.00	2x15P	28.00	34.00
2x6P	10.00	16.00	2x16P	30.00	36.00
2x7P	12.00	18.00	2x17P	32.00	38.00
2x8P	14.00	20.00	2x18P	34.00	40.00
2x9P	16.00	22.00	2x19P	36.00	42.00
2x10P	18.00	24.00	2x20P	38.00	44.00
2x11P	20.00	26.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1			
DRAWN	CHK'D	APPR	2.00mm Pitch Right angle Dual Row Wafer		
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2006WRA-2xXP		A1

A1	CHANGE THE DRAWING	2023.02.20
A0	NEW RELEASE	2019.07.10
REV	DESCRIPTION	DATE